

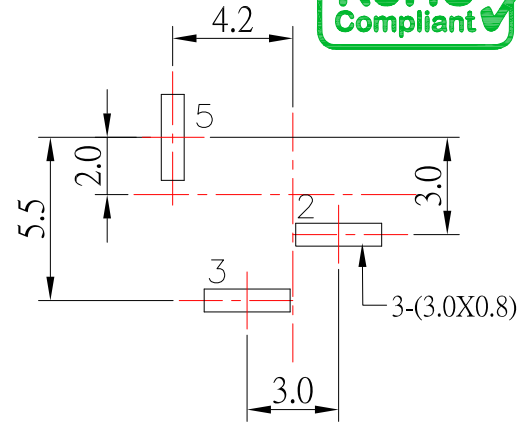
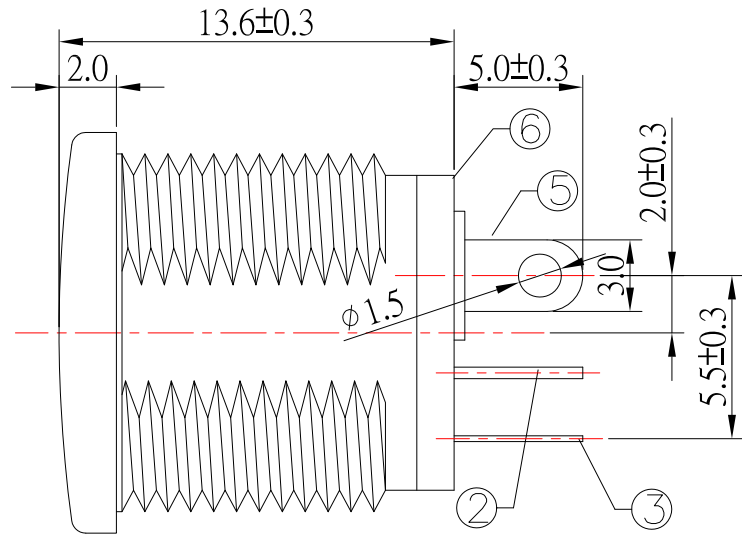


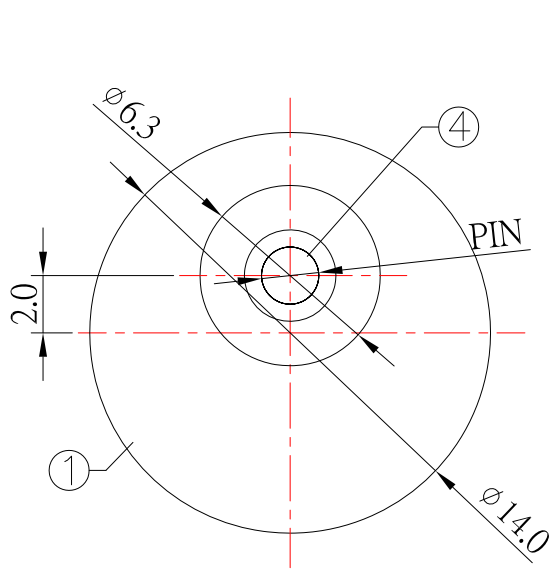

P.C.B LAYOUT
TOP VIEW

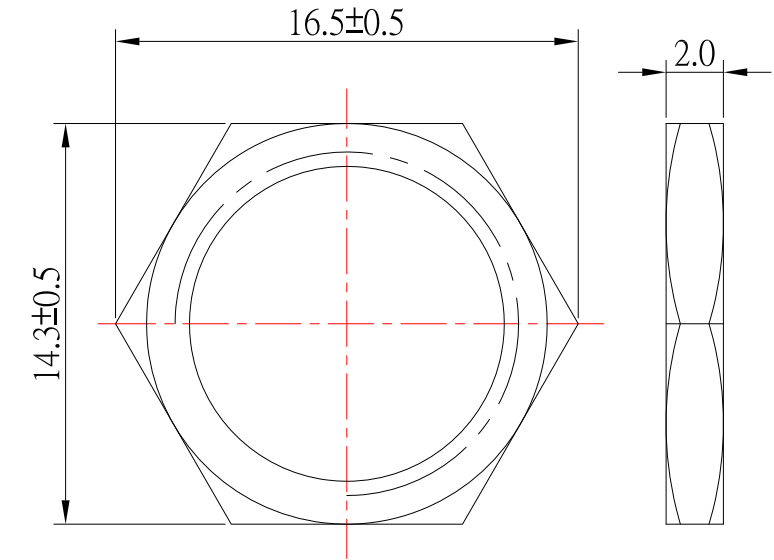

MODEL NO.	DC-D022-x-S124
SCHEMATIC	
CENTER PIN	2.0mm
	2.5mm

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

⑥	COVER	1	PF	
⑤	CONTACT FOOT	1	BRASS	Sn-Plating
④	PIN	1	BRASS	Ni-Plating
③	SPRING	1	PHOSPHOR BRONZE	Sn-Plating
②	FLAT PIECE	1	BRASS	Sn-Plating
①	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新材質	Jack	050420
3	更新尺寸	Jack	121119
2	更新尺寸標示位置	Jack	082719
1	更新尺寸	Jack	080519
ITEM NO.	DESCRIPTION	DRAWN	DATE

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/04/20			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	05/04/20			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D022-x-S124
Tony Kao	05/04/20	1 : 1		
		SHEET NO.	PART NO.	DC-D022-x-S124
		1 of 1		
				SIZE
				A4
				VER
				R4