

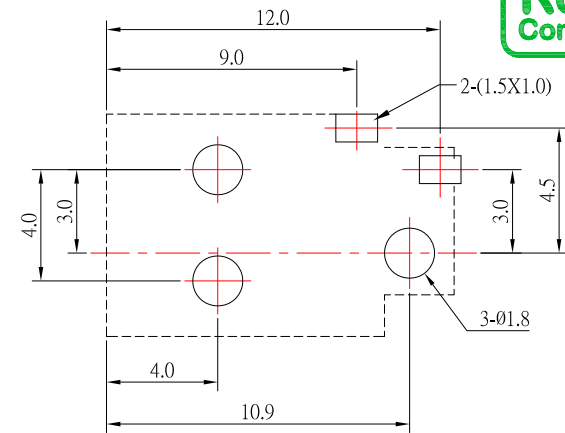
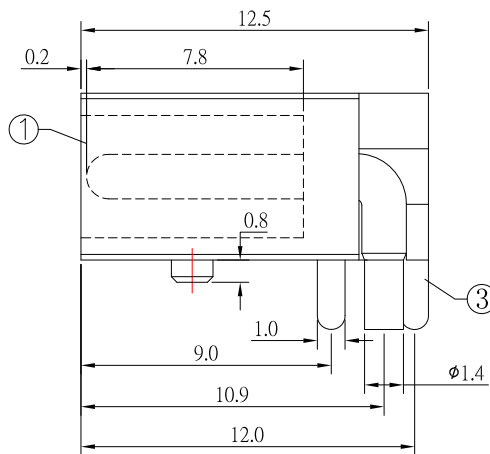
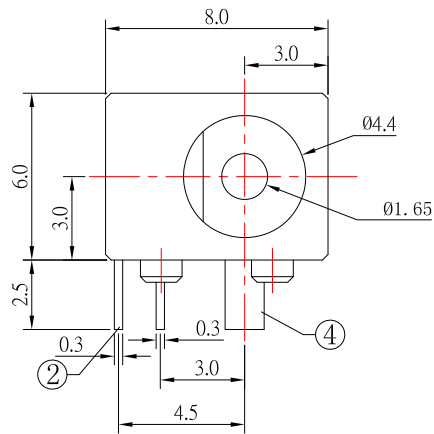


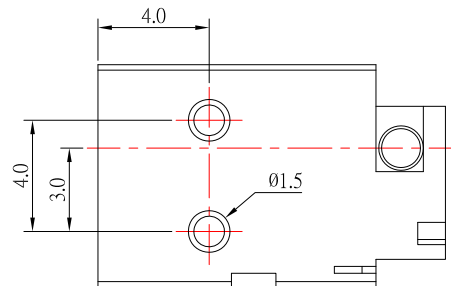


P.C.B LAYOUT
(TOP VIEW)

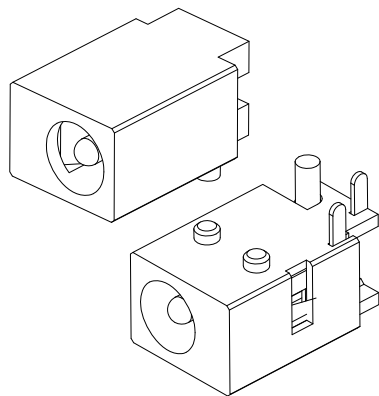

SPECIFICATION

- 1.Rating : DC 30V 2.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

MODEL NO.	DC-066
SCHEMATIC	
CENTER PIN	$\phi 1.65$ mm

4	PIN	1	BRASS	Ni-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PBT / PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	10/05/16	FINISH		MODLE	DC JACK	
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-066-1.65-S124	SIZE
Jacky Chen	10/05/16	SHEET NO.	1 of 1	PART NO.	DC-066-1.65-S124	A4
APPROVED BY:	DATE					VER
Tony Kao	10/05/16					A0

1	更新为A0版	Jack	100516
ITEM NO.	DESCRIPTION	DRAWN	DATE