


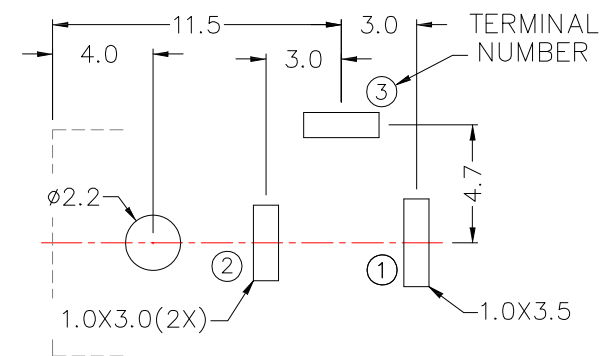
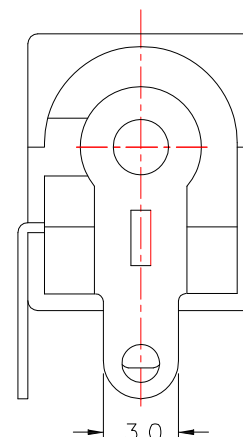
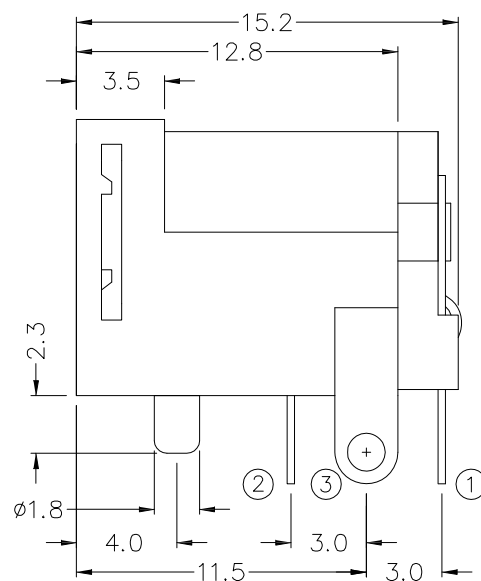


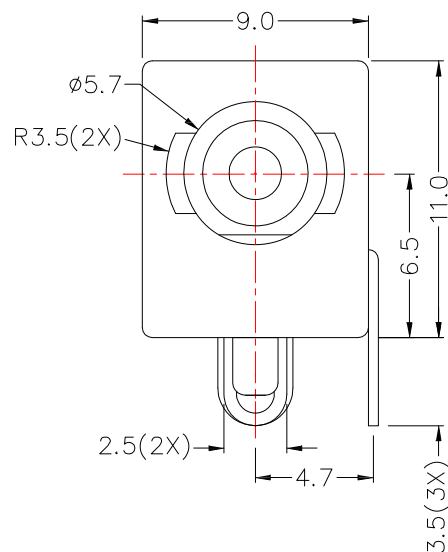


PCB LAYOUT (BOTTOM VIEW)

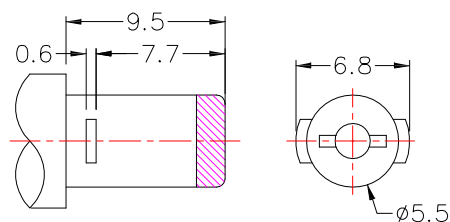

DC SPECIAL MATE PLUG



MODEL NO.	DC-062H-x
SCHEMATIC	
CENTER PIN	ϕ 2.0 mm ϕ 2.5 mm

※MATERIAL

CENTER PIN	:COPPER
TERMINAL 1	:BRASS
TERMINAL 2	:PHOSPHOR BRONZE
TERMINAL 3	:BRASS
HOUSING	:PBT
COVER	:PBT

SPECIFICATION

- 1.Rating : DC 16V 5.0A ;
- 2.Contact resistance : $\leq 50m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$ (DC500V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles .



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/06/13
DATE: 08/06/13
DATE: 08/06/13

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: JACK
MODLE: DC JACK
DWG NO.: DC-062H-x
PART NO.: DC-062H-x

SIZE: A4
VER: R