

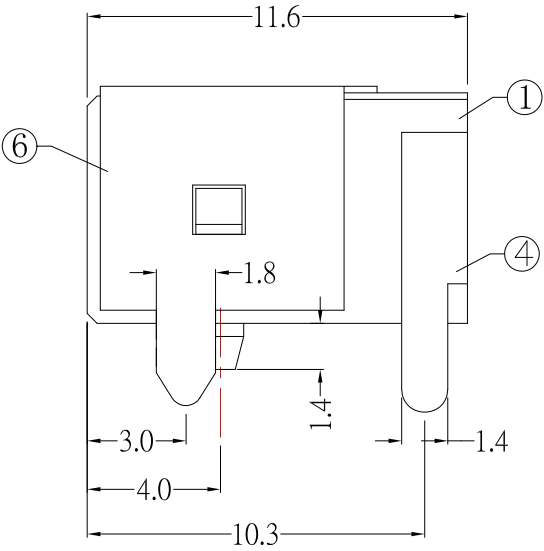
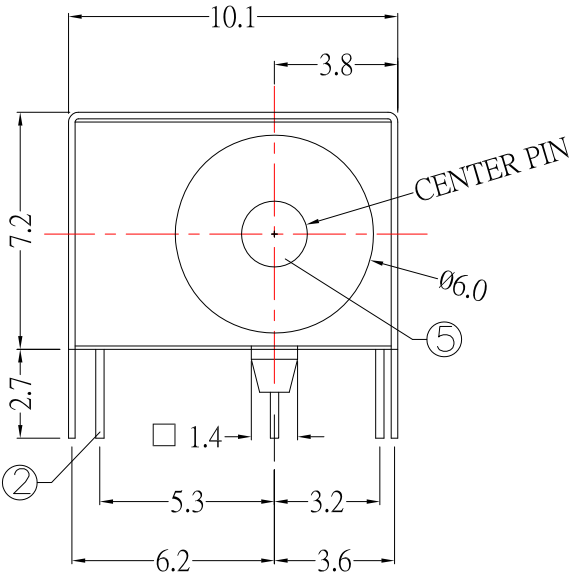


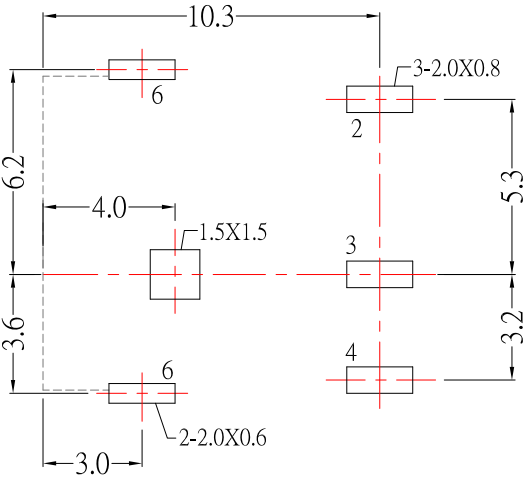

P.C.B LAYOUT
TOP VIEW



Model NO.	DC-048S
SCHEMATIC	
CENTER PIN	Ø 2.00 mm Ø 2.35 mm Ø 2.50 mm

SPECIFICATIONS

Rating	DC 30V 1.0A
Contact Resistance	≤ 50mΩ
Insulation Resistance	≥ 100MΩ (DC500V)
Withstand voltage	500VAC
Life test	5,000 cycles
Insulation and extraction forces	3-30N

6	Contact Foot	1	PHOSPHOR BRONZE	Ag-Plating
5	Pin	1	H59	Ni-Plating
4	Contact Foot	1	BRASS	Ag-Plating
3	Curve Piece	1	BRASS	Ag-Plating
2	Spring Piece	1	SUS301	Ag-Plating
1	Housong	1	PBT	
NO.	DESCRIPTION	Q' TY	MATERIAL	PLATING

5	更新SPEC及材質	Jack	091815
4	更新SCHEMATIC	Jack	012014
3	更新尺寸	Jack	010814
2	新增材質明細	Jack	052013
1	更新SPEC	Jack	112112
ITEM NO.	DESCRIPTION	DRAWN	DATE

				东莞市高迪电子有限公司			
				Dong Guan KDRR Electronic Switch Jack Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED :				Up to 5 ± 0.2	3RD. ANGEL'S	UNITS	MM
				Above 5 ~ 15 ± 0.3			
				Above 15 ~ 30 ± 0.4			
				Above 30 ~ 50 ± 0.5			
				Angle ± 0.3°			

DRAWN BY:	DATE
Jack Lu	09/18/15
CHECKED BY:	DATE
Jacky Chen	09/18/15
APPROVED BY:	DATE
Tony Kao	09/18/15

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK
SCALE	1 : 1	DWG NO.	DC-048S-x-S125
SHEET NO.	1 of 1	PART NO.	DC-048S-x-S125
		SIZE	A4
		VER	R5