
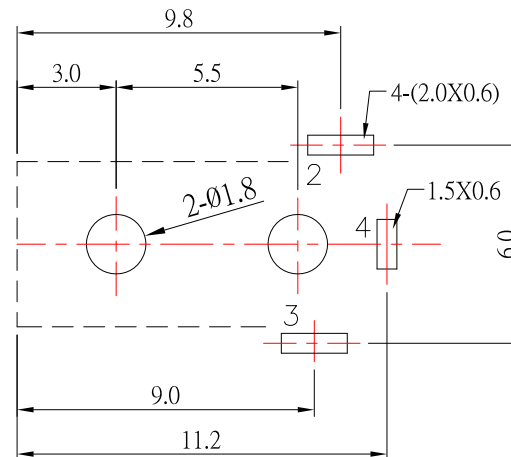
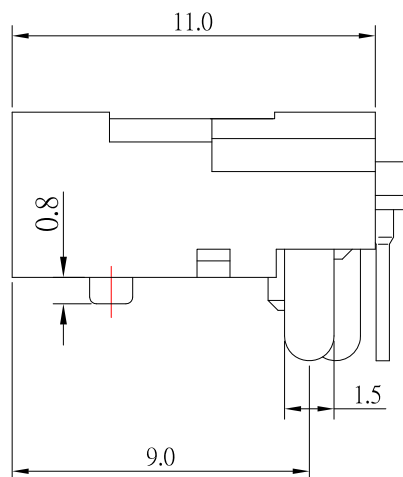
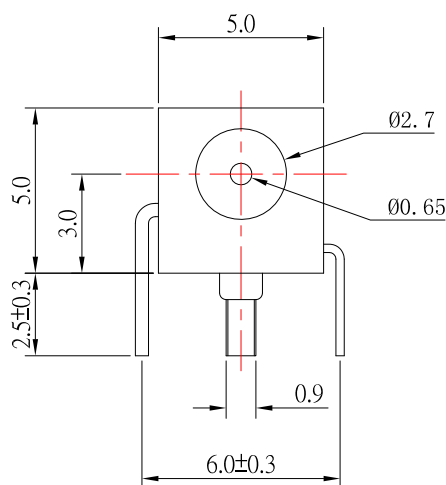

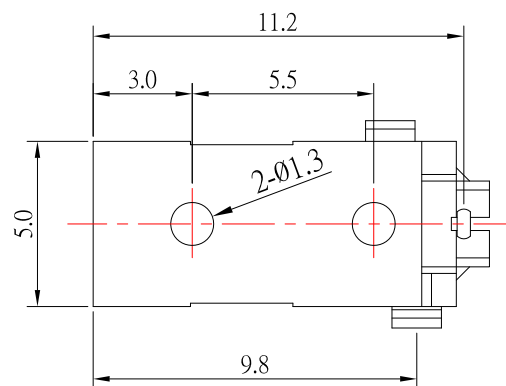


P.C.B LAYOUT
TOP VIEW

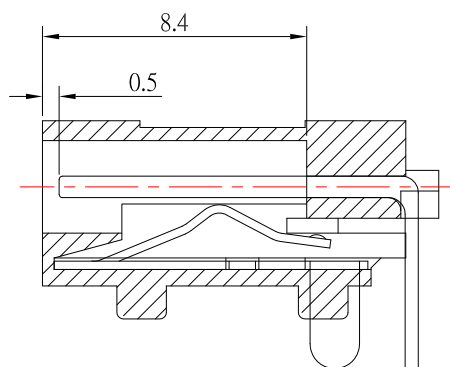

SPECIFICATION

- 1.Rating : DC 30V 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

4	PIN	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING	1	SUS	Ag-Plating
2	FLAT PIECE	1	BRASS	Ag-Plating
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/13/17	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-027-0.65-S124
Jacky Chen	03/13/17	1 : 1	PART NO.	DC-027-0.65-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	03/13/17			

1	新增剖面圖	Jack	031317
ITEM NO.	DESCRIPTION	DRAWN	DATE