

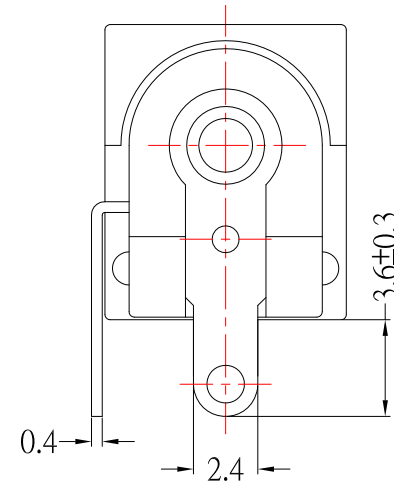
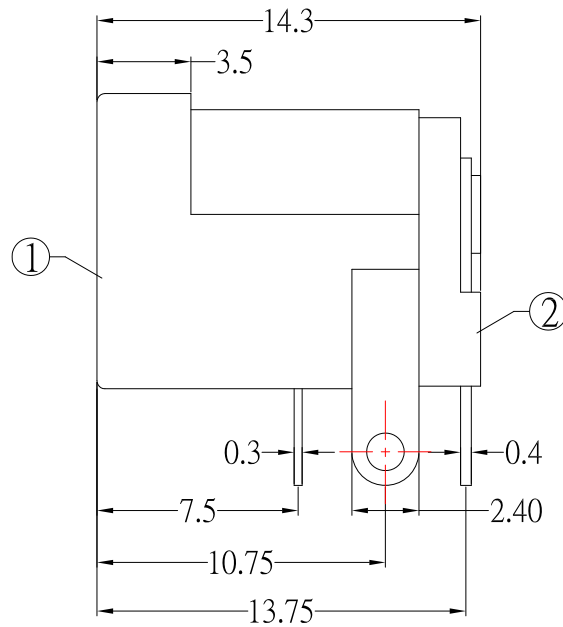
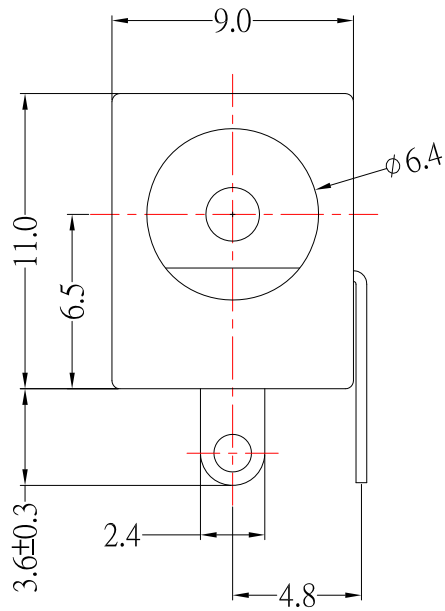


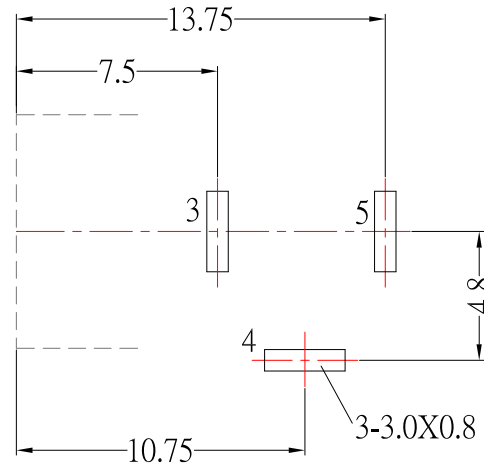

MODEL NO.	DC-021-1-x-S124
SCHEMATIC	
CENTER PIN	φ2.0 mm
	φ2.5 mm

SPECIFICATION

- 1.Rating : DC 16V , 3.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

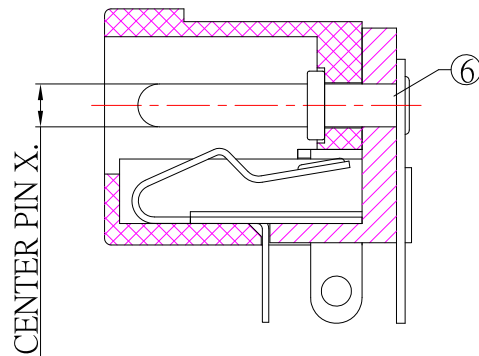

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

6	PIN	1	Brass	Ni-Plating
5	FLAT FOOT	1	Brass	Sn-Plating
4	CURVE PIECE	1	Brass	Sn-Plating
3	SPRING PIECE	1	Phosphor Bronze	Sn-Plating
2	COVER	1	PBT	
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/23/19	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-021-1-x-S124
Jacky Chen	04/23/19	1 : 1	PART NO.	DC-021-1-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/23/19			



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

2	更新樣式	Lan	042319
1	更新Rating	Jack	011817
ITEM NO.	DESCRIPTION	DRAWN	DATE