

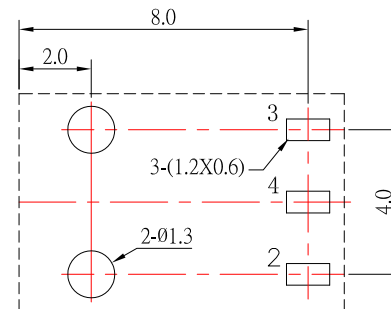
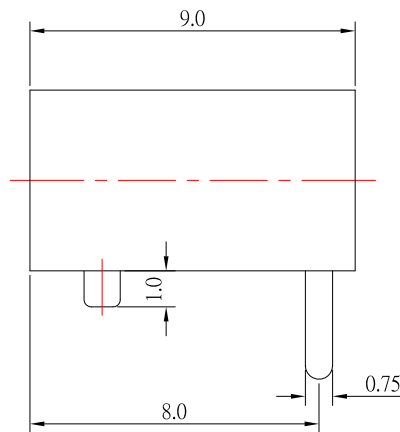
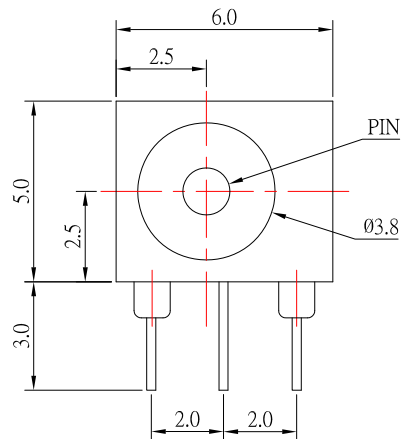
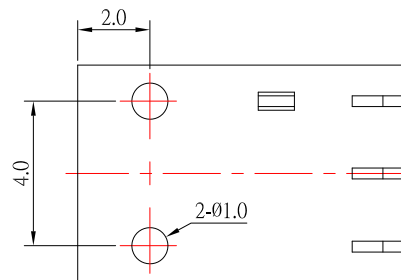


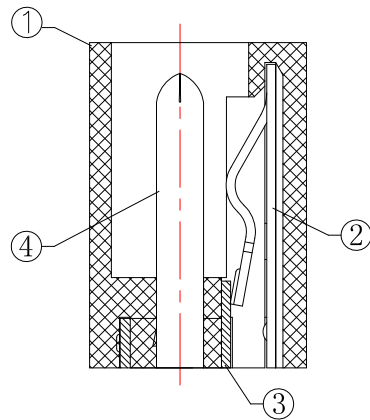

P.C.B LAYOUT
TOP VIEW

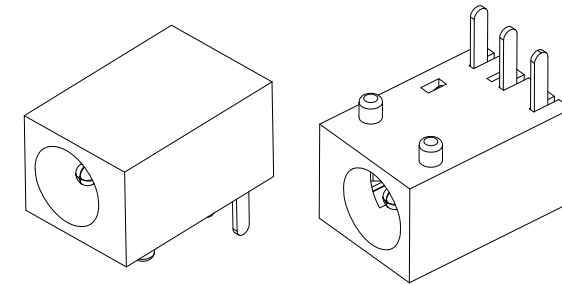

MODEL NAME	DC-015-x-S124
SCHEMATIC	
CENTER PIN	Ø1.0 Ø1.3

SPECIFICATION

- 1.Rating : DC 30V 1.0A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

④	PIN	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	STAINLESS STEEL	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/07/17
CHECKED BY: Jacky Chen
DATE: 04/07/17
APPROVED BY: Tony Kao
DATE: 04/07/17

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK
DC-015-x-S124
DC-015-x-S124

SIZE
A4
VER
A0

1	更新为A0版	Jack	040717
ITEM NO.	DESCRIPTION	DRAWN	DATE