

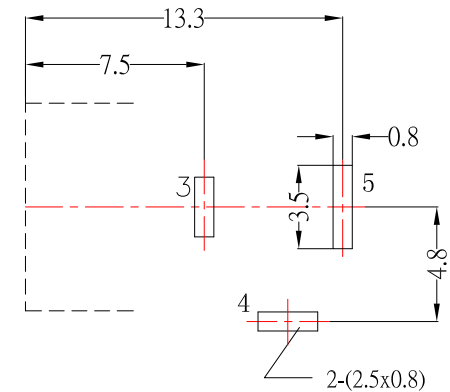
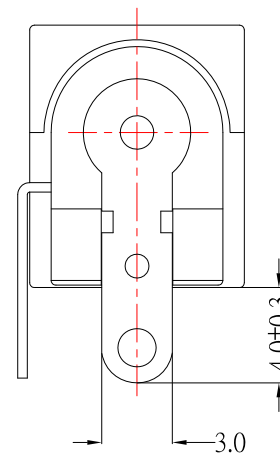
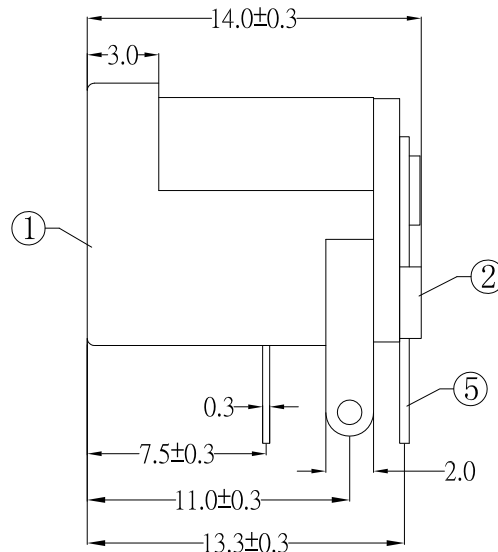
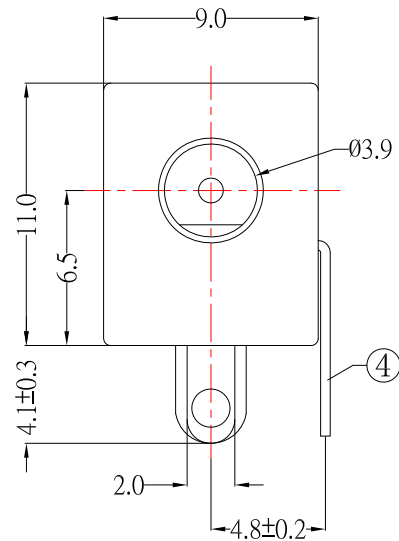


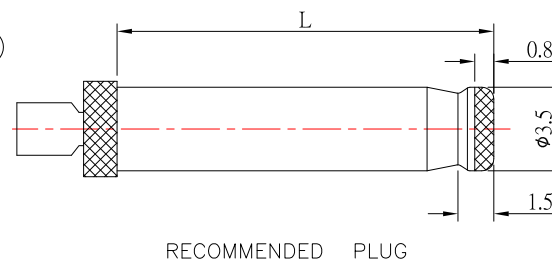


P.C.B LAYOUT
TOP VIEW

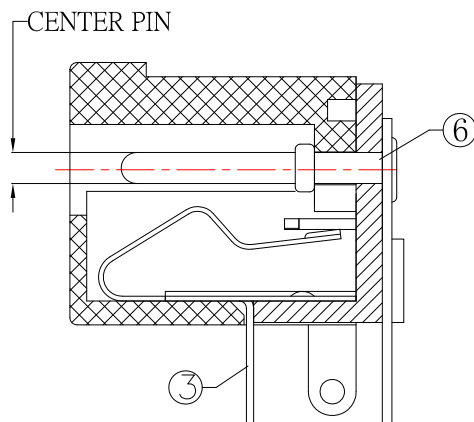

SPECIFICATION

- 1.Rating : DC 16V , 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

MODEL NO.	DC-014-1-x-S124
SCHEMATIC	
CENTER PIN	Ø1.0mm
	Ø1.3mm

6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Sn-Plating
4	CURVE PIECE	1	BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	COVER	1	PBT	
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	02/06/18			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK DIP TYPE
Jacky Chen	02/06/18			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-014-1-x-S124
Tony Kao	02/06/18	1 : 1		
		SHEET NO.	PART NO.	DC-014-1-x-S124
		1 of 1		



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

2	更新PCB LAYOUT尺寸及新增PLUG圖	Jack	020618
1	更新為A0版	Jack	051717
ITEM NO.	DESCRIPTION	DRAWN	DATE