
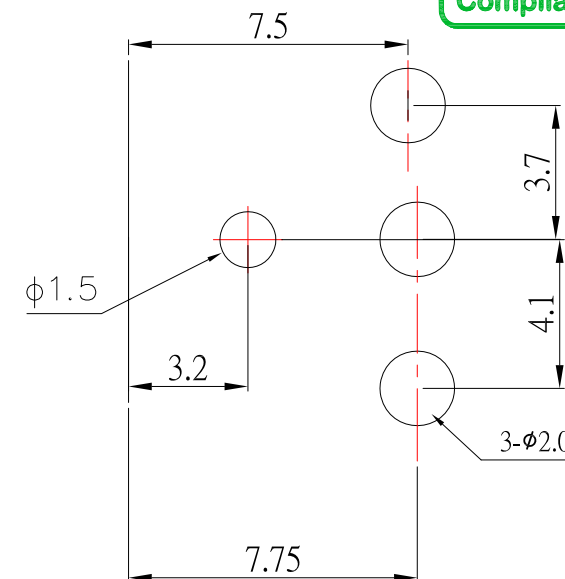
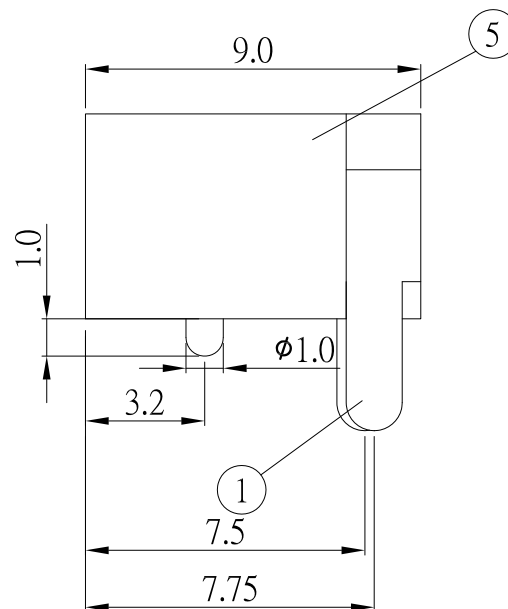


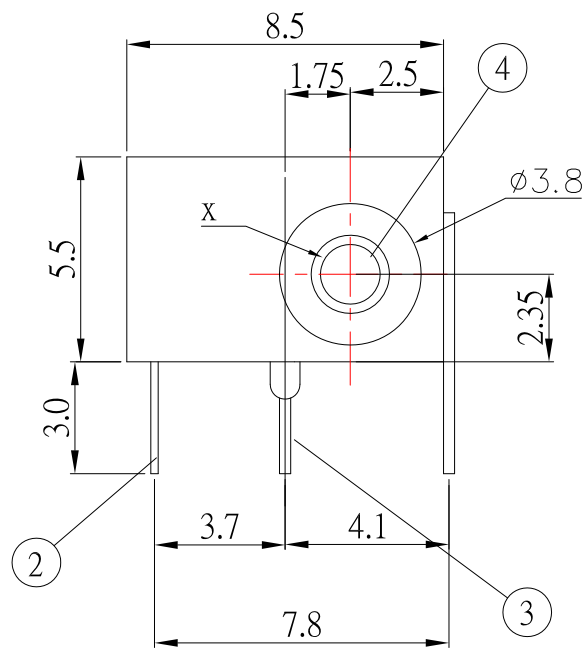

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles 。

MODEL NO.	DC-011-x-S187
SCHEMATIC	
CENTER PIN	$\phi 1.0 \text{ mm}$
	$\phi 1.3 \text{ mm}$

1	FLAT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
4	PIN	1	BRASS	Sn-Plating
5	HOUSING	1	PA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

[illegible]