

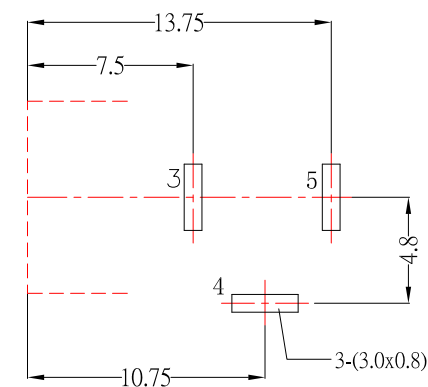
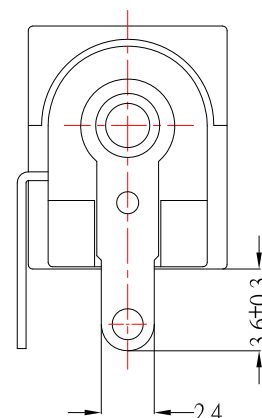
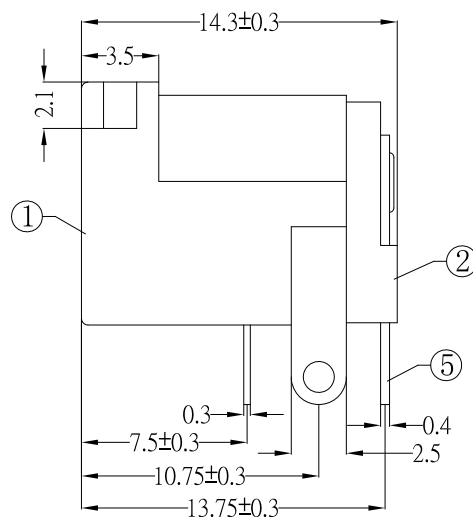
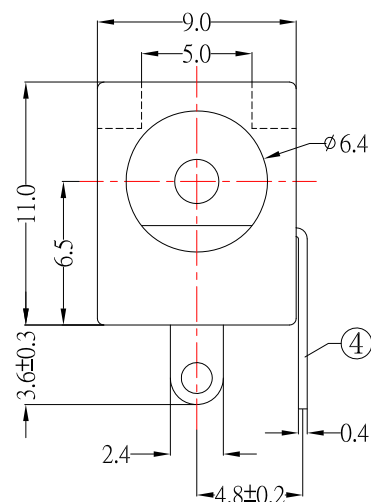


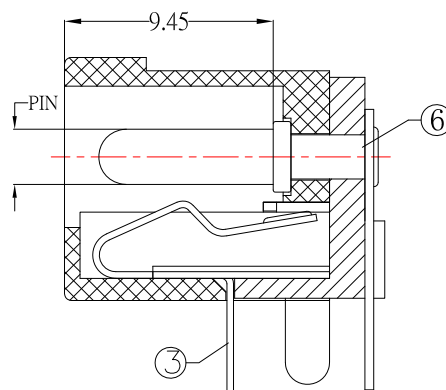

P.C.B LAYOUT
TOP VIEW

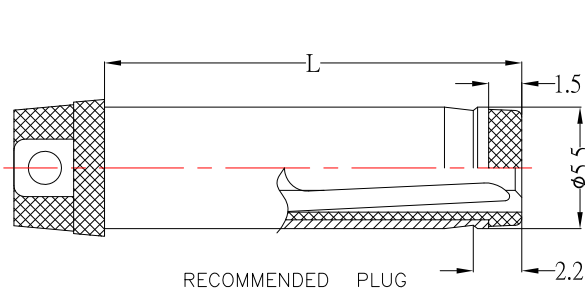

MODEL NO.	DC-002H-1-x-S124
SCHEMATIC	
CENTER PIN	Ø2.0 mm Ø2.5 mm

SPECIFICATION

- Rating : DC 12V , 6.0A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

⑥	PIN	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	FLAT PIECE	1	BRASS	Sn-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
②	COVER	1	LCP	
①	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/06/20			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK DIP TYPE
Jacky Chen	03/06/20			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-002H-1-x-S124
Tony Kao	03/06/20	1 : 1		
		SHEET NO.	PART NO.	DC-002H-1-x-S124
		1 of 1		
				SIZE A4
				VER R2

2	新增尺寸	Jack	030620
1	新增尺寸	Jack	041018
ITEM NO.	DESCRIPTION	DRAWN	DATE