

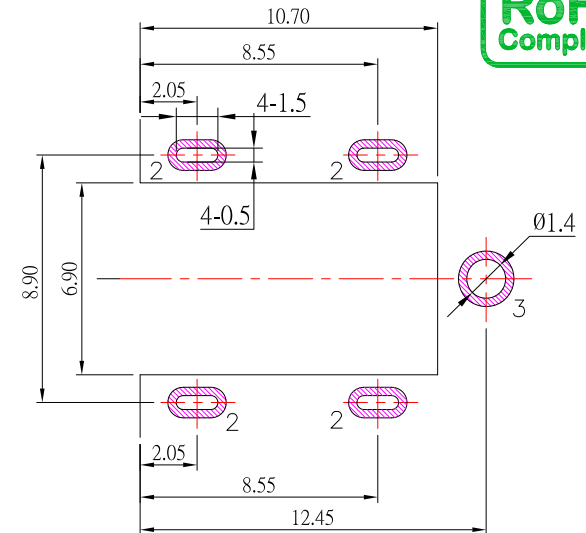
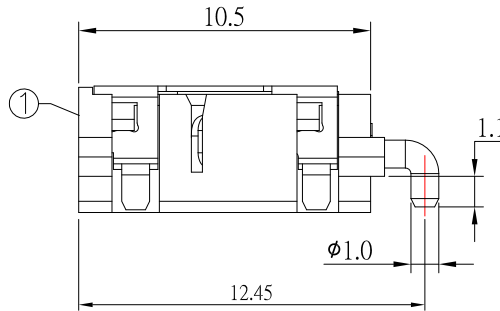
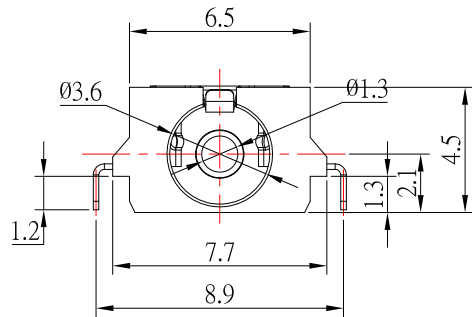


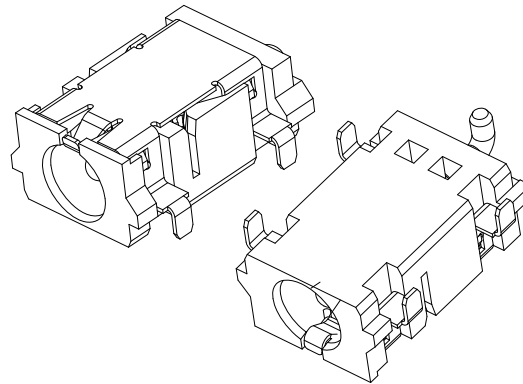

P.C.B LAYOUT
(TOP VIEW)

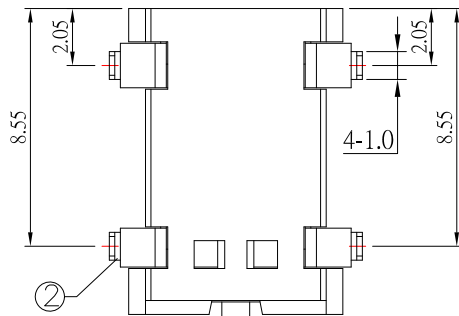

MODEL NO.	DC-S158-1.3
SCHEMATIC	

SPECIFICATION

- Rating : DC 30V, 3.0A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles .

3	PIN	1	BRASS	Ni-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 04/09/18
DATE: 04/09/18
DATE: 04/09/18

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

JACK
DC JACK
1 : 1

DC-S158-1.3-S124
PART NO. DC-S158-1.3-S124

SIZE
A4
VER
A1

2	新增尺寸	Jack	040918
1	更新料號及更新為A0版	Jack	120716
ITEM NO.	DESCRIPTION	DRAWN	DATE