

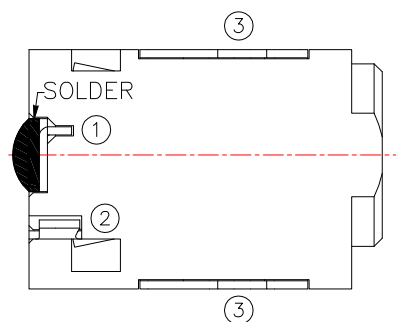
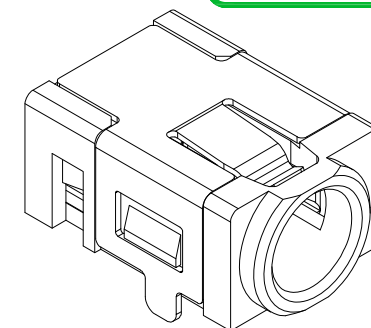
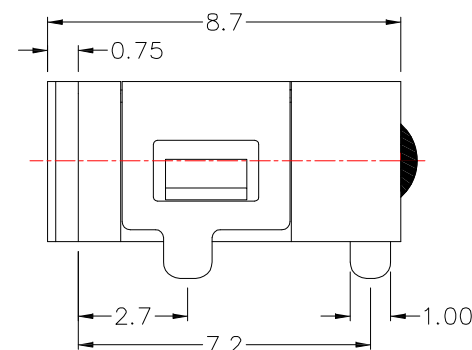
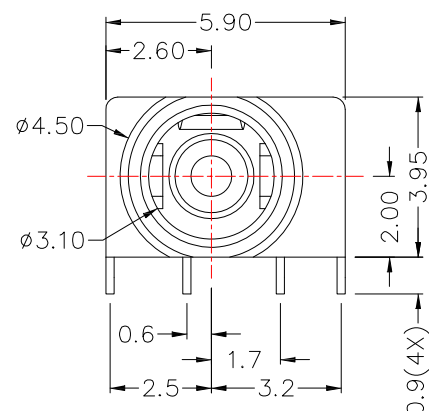
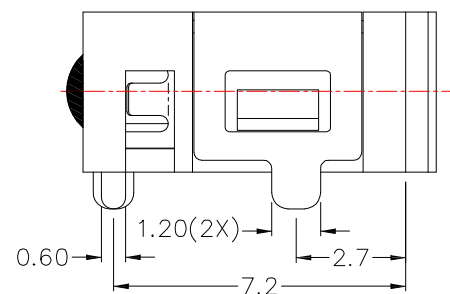
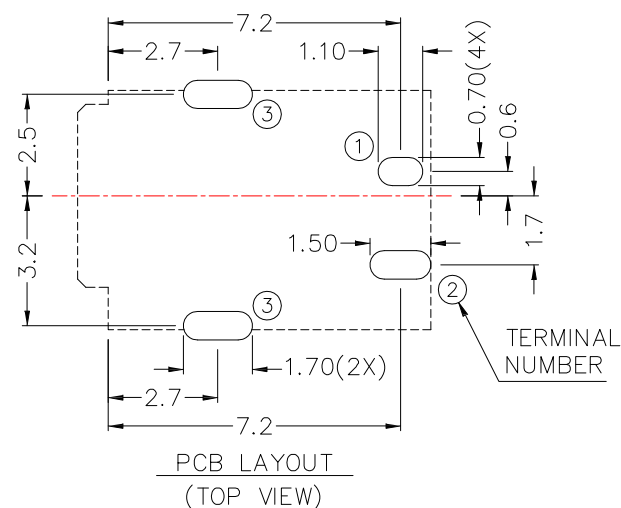


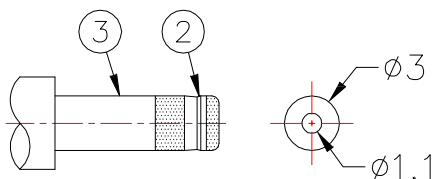

DC MATE PLUG



MODEL NO.	DC-082H-2-1.0
SCHEMATIC	
CENTER PIN	ø1mm

*MATERIAL

CENTRE PIN : BRASS
TERMINAL 1 : BRASS
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
HOUSING : PA6T

SPECIFICATION

1. Rating : DC 16V 3.5A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/12/14
DATE: 08/12/14
DATE: 08/12/14

MAT'L
FINISH
SCALE

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK
DC-082H-2-1.0
DC-082H-2-1.0

SIZE
A4
VER
R1

2	新增SPEC	Jack	081214
1	料號更新	FrankWu	072412
ITEM NO.	DESCRIPTION	DRAWN	DATE