


MODEL NO.	DC-080DH
SCHEMATIC	
CENTER PIN	ø2mm ø2.5mm

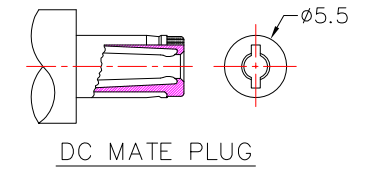

***MATERIAL**

- CENTRE PIN :PHOSPHOR BRONZE
- TERMINAL 1 :BRASS
- TERMINAL 2 :PHOSPHOR BRONZE
- TERMINAL 3 :BRASS
- HOUSING :PA6T
- COVER :PA6T

SPECIFICATION

- 1.Rating : DC 16V 5.0A
- 2.Contact resistance : ≤ 50mΩ
- 3.Insulation resistance : ≥ 100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/12/14		MODLE	DC JACK
CHECKED BY:	DATE	FINISH	DWG NO.	DC-080DH-x
Jacky Chen	08/12/14		PART NO.	DC-080DH-x
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	08/12/14	SHEET NO.	1 of 1	
				SIZE
				A4
				VER
				R1

1	新增SPEC	Jack	081214
ITEM NO.	DESCRIPTION	DRAWN	DATE