



CIRCUIT

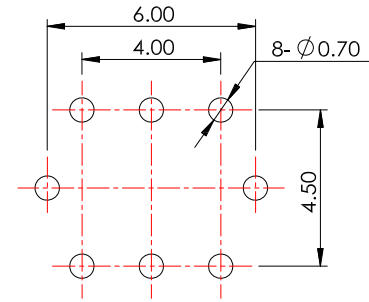

P.C.B LAYOUT MOUNTING PATTERN

PS-6041N-xx-S088

COLOR OF LED




0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

COLOR OF LED

0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

SPECIFICATIONS:

- 1.RATING : 0.1A , 30VDC
- 2.CONTACT RESISTANCE : 100 mΩ Max
- 3.INSULATION RESISTANCE : 100 MΩ min
- 4.DIELETRIC STRENGTH : 250 V AC / 1 MIN
- 5.OPERATING TEMPERTURE : -16°C to 60°C
- 6.OPERATING FORCE : 180 ± 500 gf
7. LIFE : 10,000 cycles .
- 8.Timing: Non-Shorting
- 9.Operation: Non-Lock TYPE

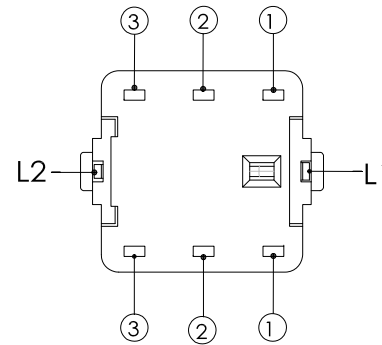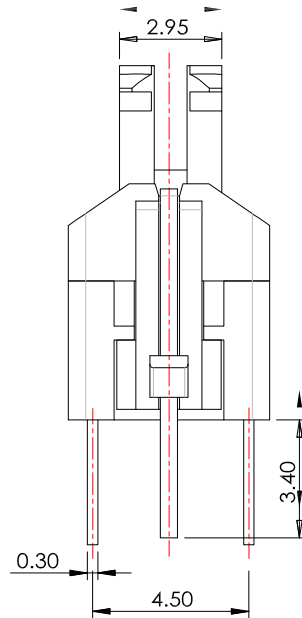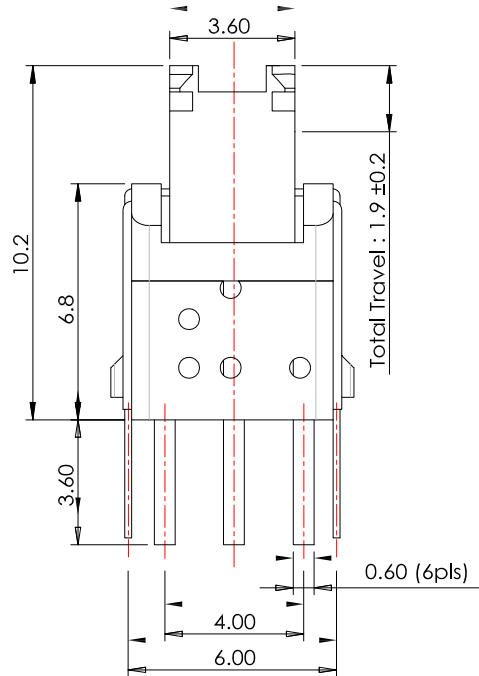

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
02/24/17
DATE
02/24/17
DATE
02/24/17

MAT'L	TITLE	SWITCH
FINISH	MODLE	Push switch Non-Lock Type
SCALE	DWG NO.	PS-6041N-xx-S088
SHEET NO.	PART NO.	PS-6041N-xx-S088
	SIZE	A4
	VER	R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新料號	Jack	022417