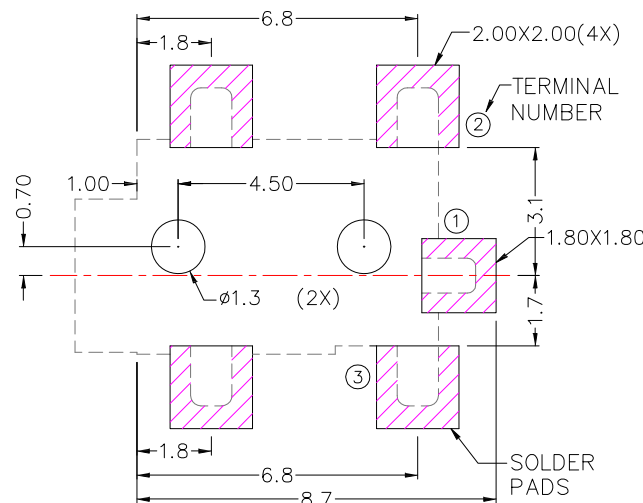
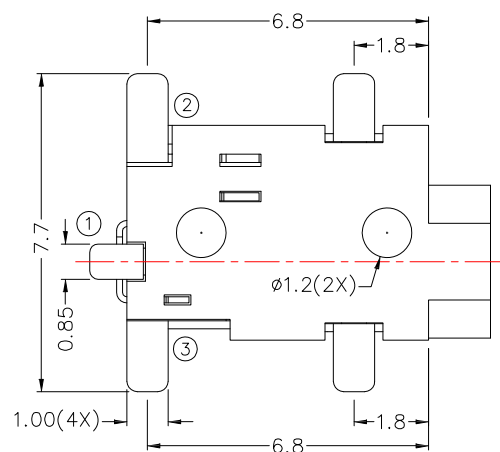

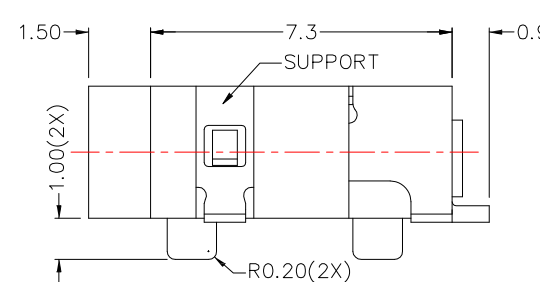
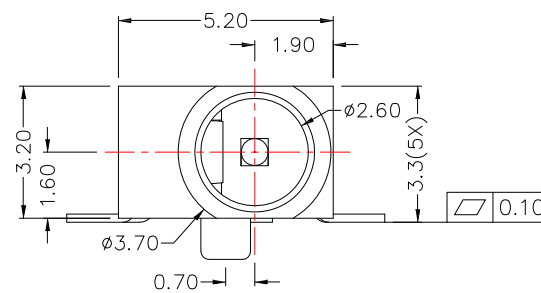
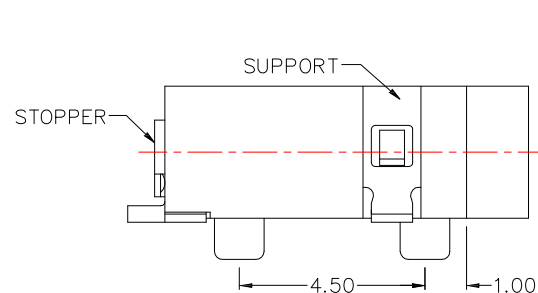


DC MATE PLUG

MODEL NO.	DC-065D
SCHEMATIC	 1 3 2
CENTER PIN	0.65mm

* MATERIAL

TERMINAL 1 : BRASS
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : BRASS
SUPPORT : BRASS
STOPPER : STAINLESS STEEL
HOUSING : PA6T

SPECIFICATION

- Rating : DC 16V 1.0A
- Contact resistance : $\leq 50m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- Life test : 5,000 cycles



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
08/11/14
DATE
08/11/14
DATE
08/11/14

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK
DC-065D
DC-065D

SIZE
A4
VER
A1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SPEC	Jack	081114