

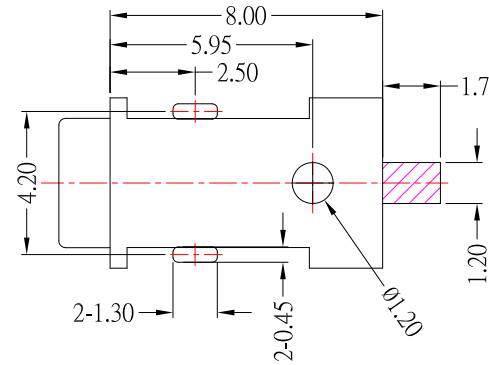
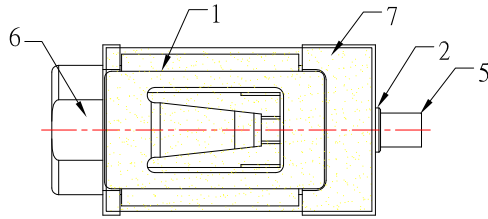

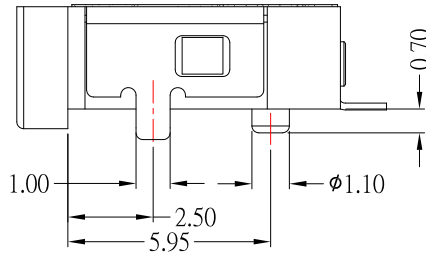






CIRCUIT DIAGRAM



SPECIFICATION

- 1.Rating : 0.5A , 30VDC ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.life test : 5,000 cycles .
- 6.Connector mating forces : 20N (2.04Kgf) Max ;
- 7.Connector unmating forces : 2N(0.204Kgf) Min .

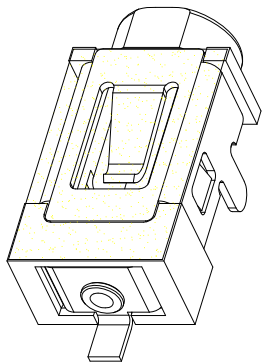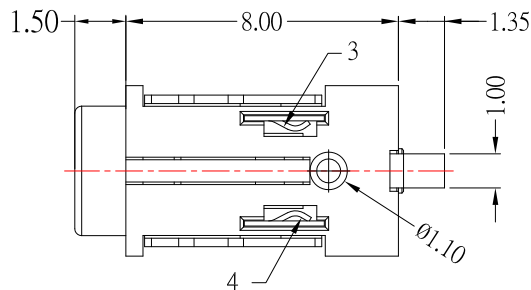

7	MYLAR	1		Yellow
6	HOUSING	1	HIGH TEMPERATURE PLASTIC	UL94V-0,Black
5	CONTACT E	1	PHOSPHOR BRONZE	Au-Plated
4	CONTACT D	1	STAINLESS STEEL	
3	CONTACT C	1	STAINLESS STEEL	
2	CONTACT B	1	PHOSPHOR BRONZE	Au-Plated
1	CONTACT A	1	PHOSPHOR BRONZE	Au-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/12/14			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	05/12/14			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-063DS-3-0.65-S119
Tony Kao	05/12/14	1 : 1		
		SHEET NO.	PART NO.	DC-063DS-3-0.65-S119
		1 of 1		
				SIZE A4
				VER A0