

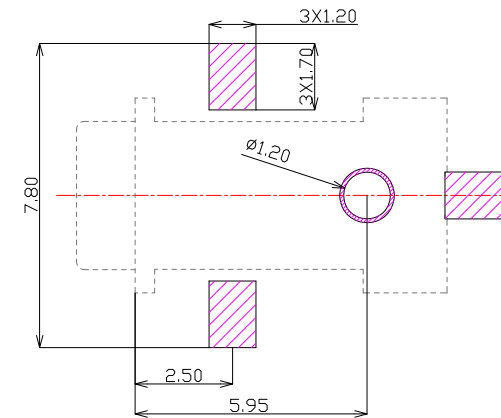
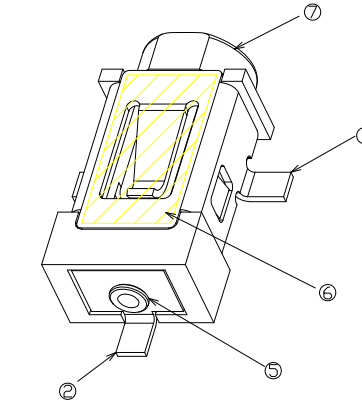
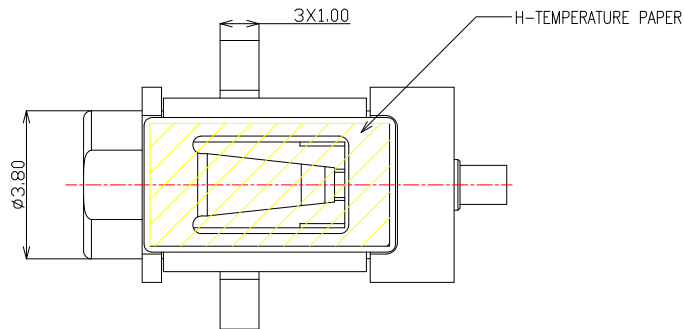



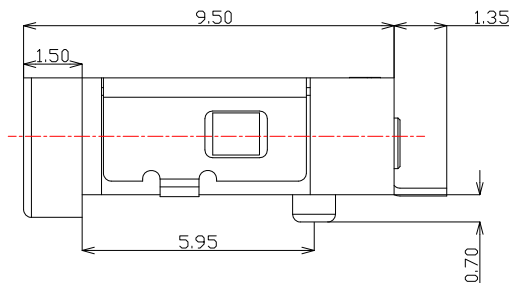


LAYOUT PCB
BOTTOM VIEW

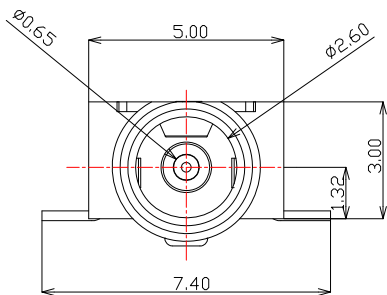


SPECIFICATION

- 1.Rating : 0.5A , 30VDC ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.life test : 5,000 cycles °
- 6.Connector mating forces : 20N (2.04Kgf) Max ;
- 7.Connector unmating forces : 2N(0.204Kgf) Min °



CIRCUIT DIAGRAM

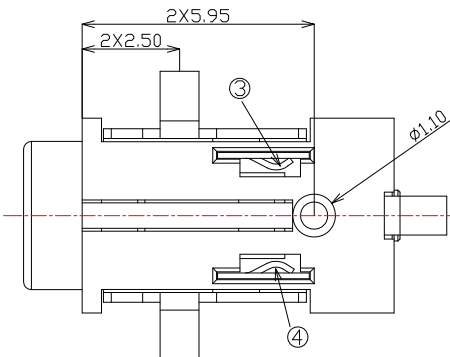

7	MYLAR	1		
6	HOUSING	1	HTN	
5	CONTACT E	1	PHOSPHOR BRONZE	GOLD PLATED
4	CONTACT D	1	STAINLESS STEEL	
3	CONTACT C	1	STAINLESS STEEL	
2	CONTACT B	1	BRASS	GOLD PLATED
1	CONTACT A	1	PHOSPHOR BRONZE	GOLD PLATED
ITEM	NAME	Q'TY	MATERIAL	DESCRIPTION



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/04/15
DATE: 08/04/15
DATE: 08/04/15

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: JACK
MODLE: DC JACK
DWG NO.: DC-063DS-S119
PART NO.: DC-063DS-S119

SIZE: A4
VER: R2

3	新增SPEC	Jack	080415
2	更新材質	Jack	042214
1	圖面更新	FrankWu	112811
ITEM NO.	DESCRIPTION	DRAWN	DATE