

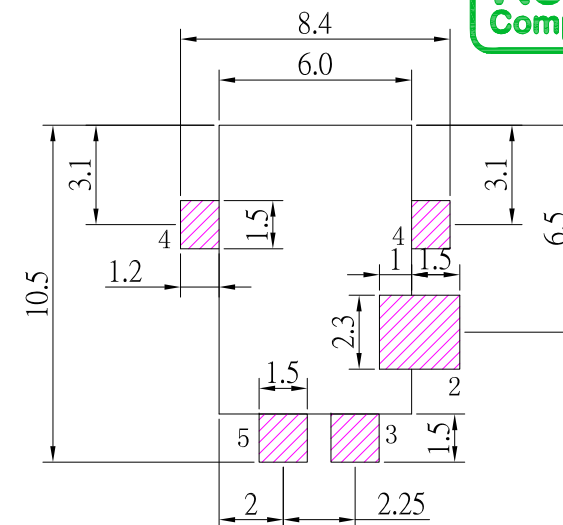

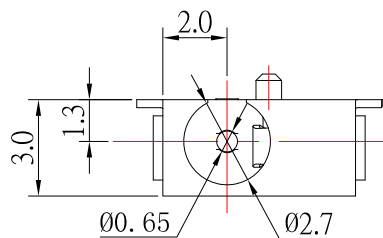
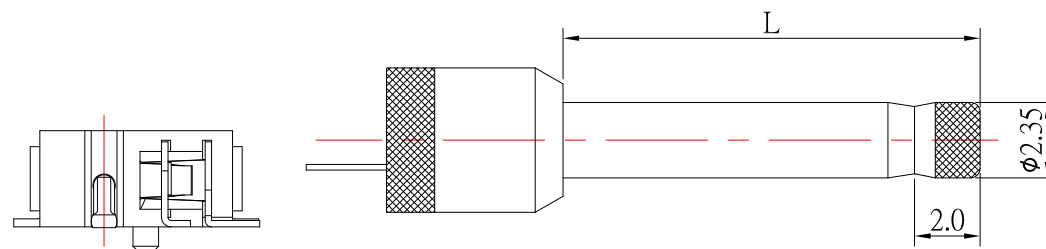
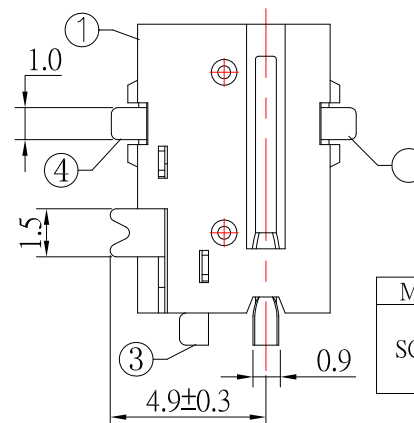


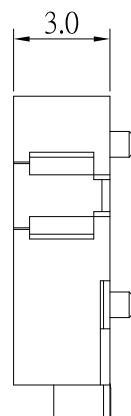

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

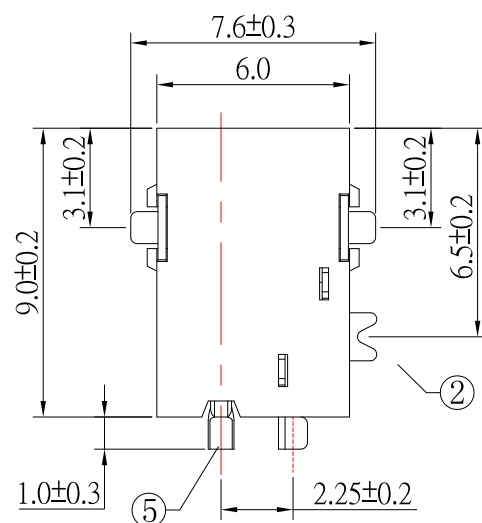

RECOMMENDED PLUG

SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 2-20N
- 6.life test : 5,000 cycles °

MODEL NO.	DC-057D-0.65
SCHEMATIC	

⑤	PIN	1	BRASS	Ni-Plating
④	CURVE PIECE	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	SUS	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/21/18
DATE: 05/21/18
DATE: 05/21/18

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK
SCALE	1 : 1	DWG NO.	DC-057D-0.65-S124
SHEET NO.	1 of 1	PART NO.	DC-057D-0.65-S124

SIZE
A4
VER
R1