

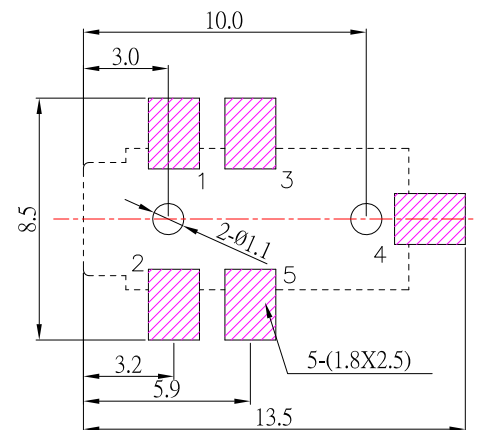
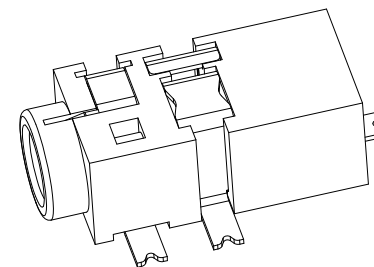
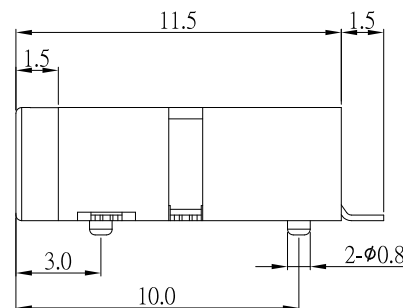

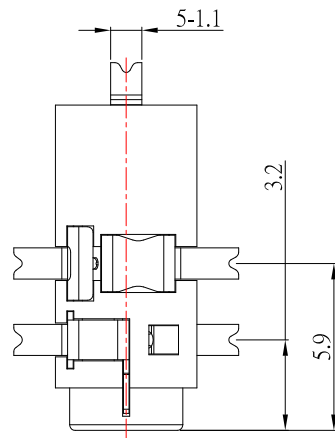


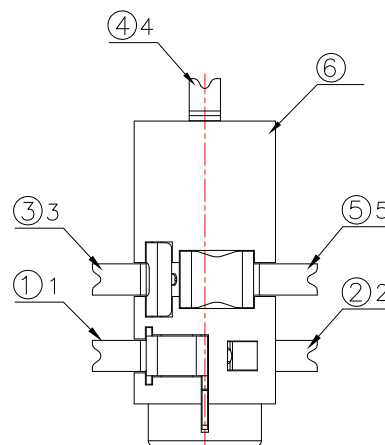

P.C.B LAYOUT

SPECIFICATION

- 1.Rating : DC 50V 0.3A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

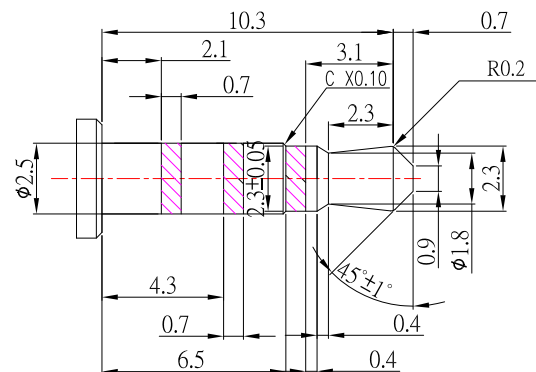

MODEL NO.	PJ-2845D-S187
SCHMATIC	

⑥	HOUSING	1	PA-9T (Black)	
⑤	TERMINAL #5	1	PHOSPHOR BRONZE	Ag-Plated
④	TERMINAL #4	1	PHOSPHOR BRONZE	Ag-Plated
③	TERMINAL #3	1	PHOSPHOR BRONZE	Ag-Plated
②	TERMINAL #2	1	PHOSPHOR BRONZE	Ag-Plated
①	TERMINAL #1	1	PHOSPHOR BRONZE	Ag-Plated
No.	PART NAME	QTY	MATERIAL (THICK, COLOR)	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 11/04/15

CHECKED BY: Jacky Chen
DATE: 11/04/15

APPROVED BY: Tony Kao
DATE: 11/04/15

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

PHONE JACK

PJ-2845D-S187

PJ-2845D-S187

SIZE

A4

VER

R2

2	新增SPEC	Jack	110415
1	更新料號	Jack	041814
ITEM NO.	DESCRIPTION	DRAWN	DATE