

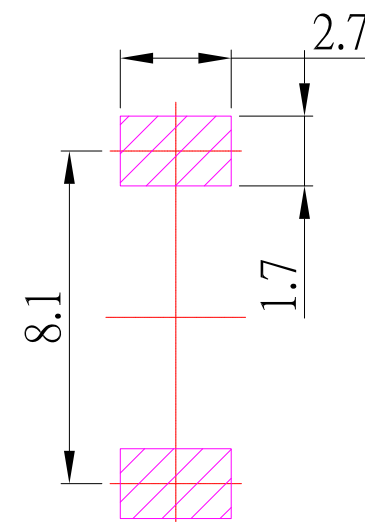
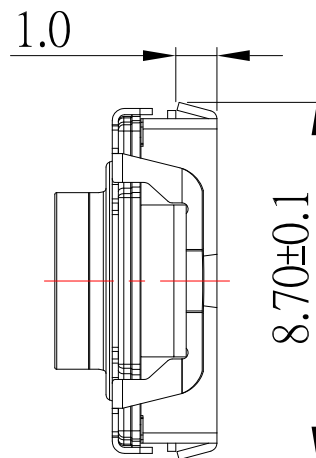
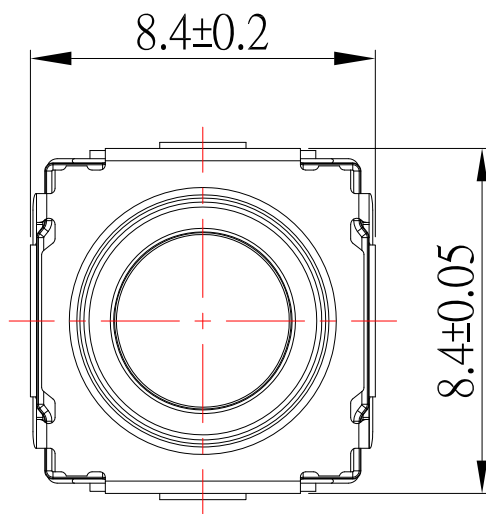




P.C.B MOUNTING PATTERN DIMENSION

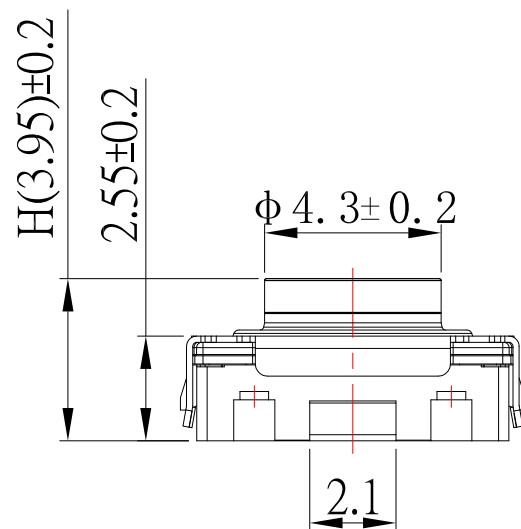

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA Max.
Contact Resistance	100mΩ Max.
Travel	0.90 ± 0.2mm
Operating Force	400 ± 80gf
Operating Life (cycles)	500,000

5	TERMINAL(端 子)	1	H65	Ag plating
4	HOUSING(基 座)	1	LCP	—
3	CONTACT FORM(弹 片)	1	SUS	Ag plating
2	COVER(盖板)	1	SUS	
1	STEM(按钮)	1	SILICONE	
NO	PART NAME	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/29/19
DATE: 10/29/19
DATE: 10/29/19

MATL		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH Long Travel :0.9mm
SCALE	1 : 1	DWG NO.	TS-A69-7-S138
SHEET NO.	1 of 1	PART NO.	TS-A69-7-S138

ITEM NO.	DESCRIPTION	DRAWN	DATE