
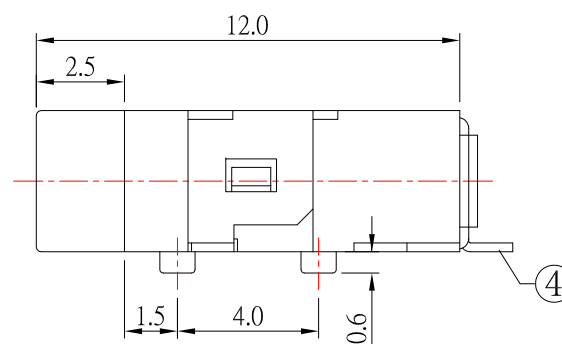





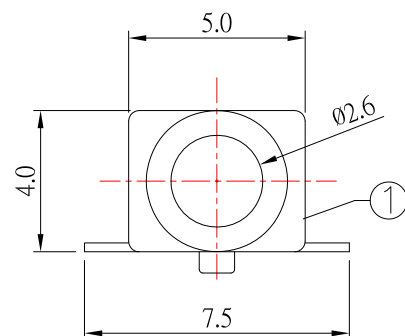


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
4. Withstand voltage : 250VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles .

MODEL NO.	PJ-2804D-S125	PJ-2803D-S125
SCHEMATIC		

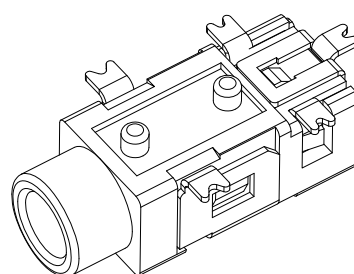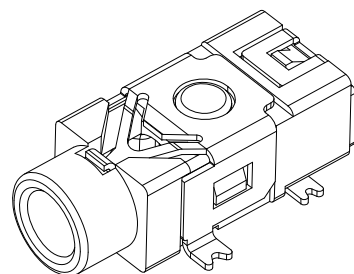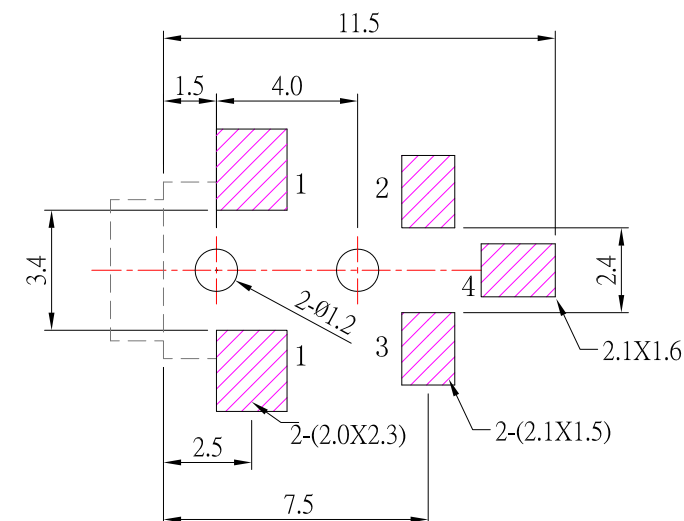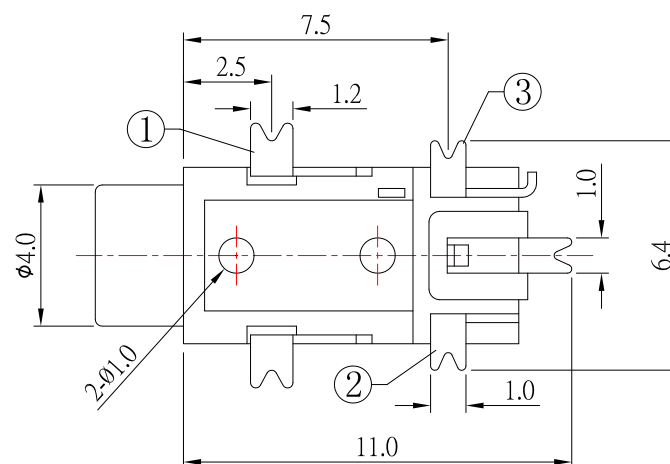

5	HOUSING	1	PA9T	
4	CURVE PIECE	1	Brass	Au-Plating
3	SPRING PIECE	1	Phosphor Bronze	Au-Plating
2	SPRING PIECE	1	Phosphor Bronze	Au-Plating
1	CONTACT FOOT	1	Phosphor Bronze	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	07/22/13			FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-280xD-S125	SIZE
Jacky Chen	07/22/13					
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	PJ-280xD-S125	VER
Tony Kao	07/22/13					



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

MM