
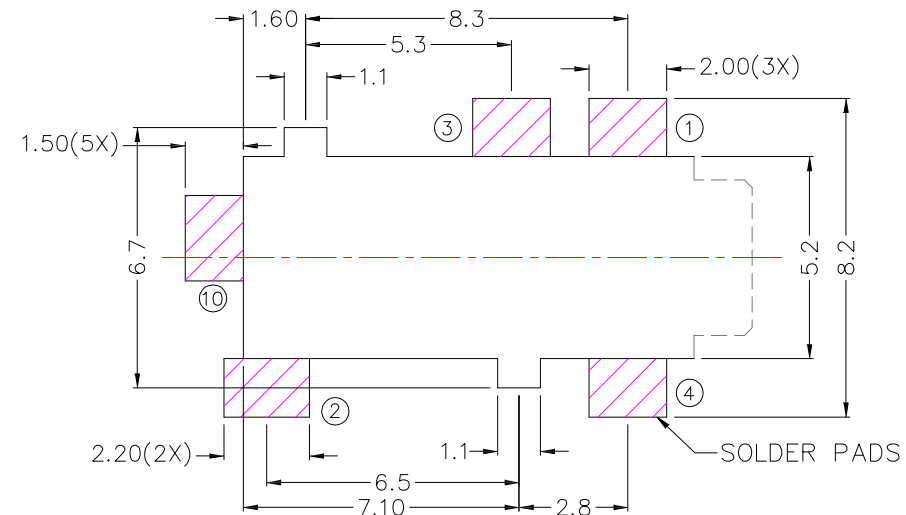

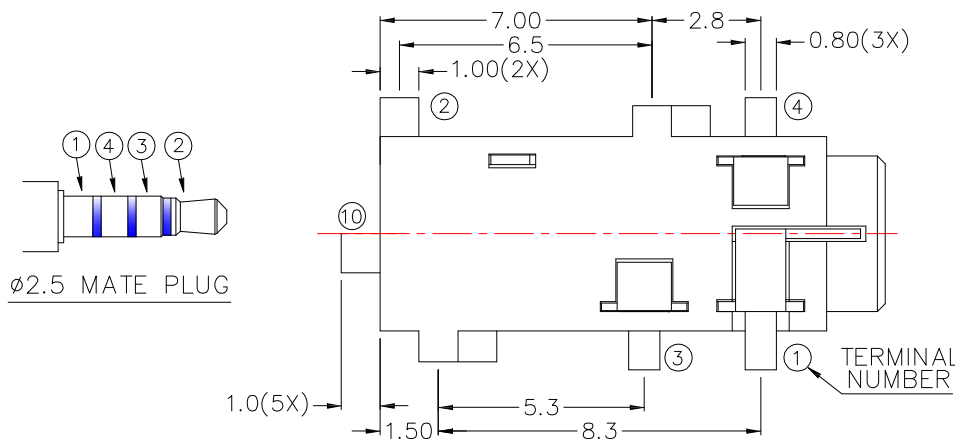
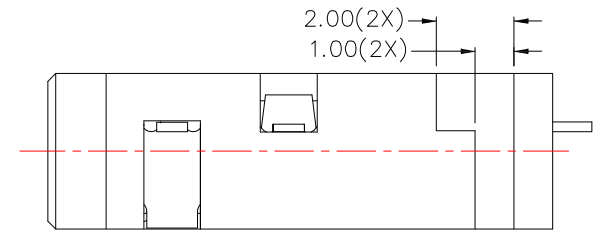
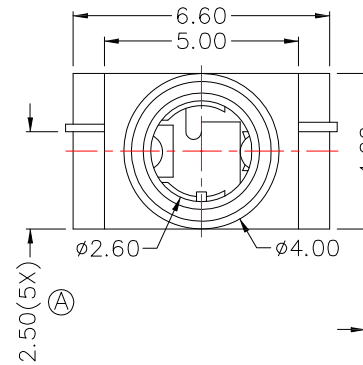


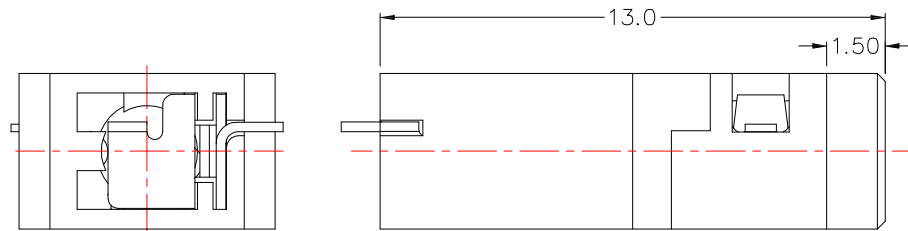

RECOMMENDED SOLDER PAD LAYOUT

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10 : BRASS
HOUSING : PA6T

MODEL NO.	PJ-2775D	PJ-2774D	PJ-2774AD
SCHEMATIC			



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
11/04/15

CHECKED BY:
Jacky Chen

DATE
11/04/15

APPROVED BY:
Tony Kao

DATE
11/04/15

MAT'L	TITLE	JACK
FINISH	MODLE	PHONE JACK
SCALE	1 : 1	DWG NO. PJ-277xD
SHEET NO.	1 of 1	PART NO. PJ-277xD

SIZE
A4
VER
R1