

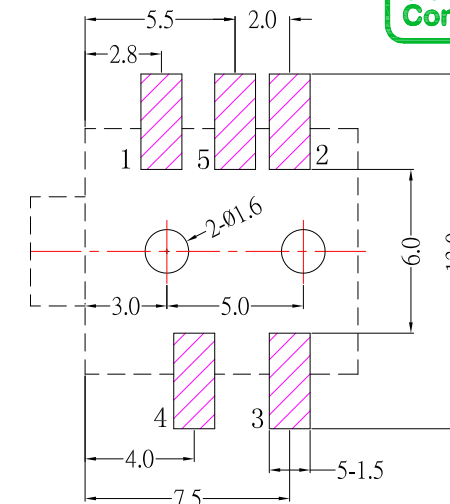
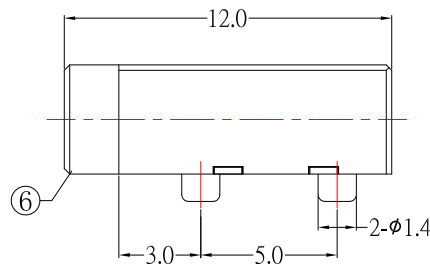
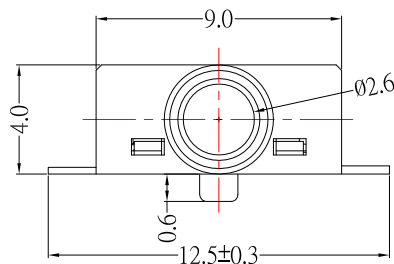
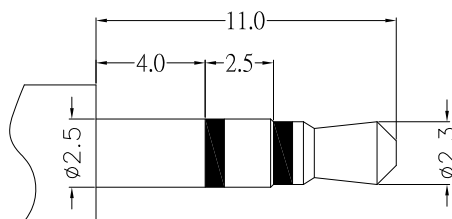


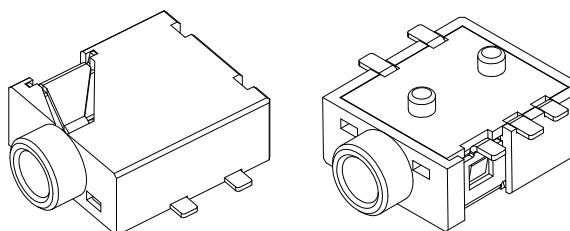

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

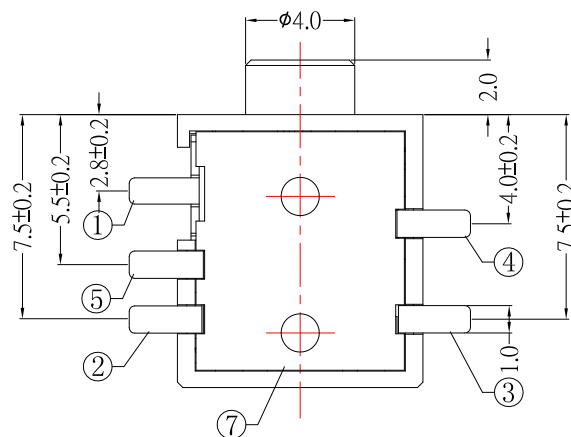

Ø2.50mm 3 POLE PLUG

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

MODEL NO.	PJ-2595-S124	PJ-2594A-S124	PJ-2594B-S124	PJ-2593-S124
SCHEMATIC				

7	COVER	1	PA9T	
6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	BRASS	Au-Plating
4	4# CONTACT FOOT	1	BRASS	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/15/18			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	03/15/18			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-259x-S124
Tony Kao	03/15/18	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-259x-S124
				SIZE A4
				VER R1

1	更新尺寸	Jack	031518
ITEM NO.	DESCRIPTION	DRAWN	DATE