


P.C.B LAYOUT
(TOP VIEW)

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °


Ø3.50mm 3 POLE PLUG

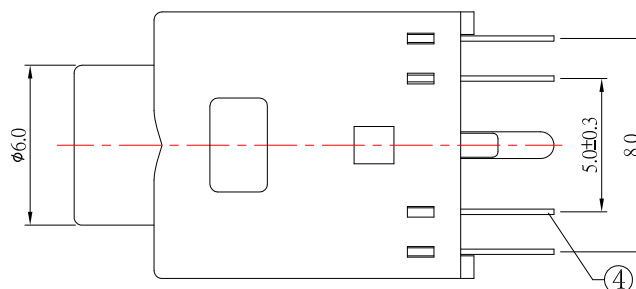

SCHEMATIC

PJ-D3058	PJ-D3058-1	PJ-D3058-2	PJ-D3058-3

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
6	HOUSING	1	PBT	
5	FLAT PIECE	1	Brass	Sn-Plating
4	FLAT PIECE	1	Brass	Sn-Plating
3	SPRING PIECE	1	Phosphor Bronze	Sn-Plating
2	SPRING PIECE	1	Phosphor Bronze	Sn-Plating
1	CONTACT FOOT	1	Phosphor Bronze	Sn-Plating

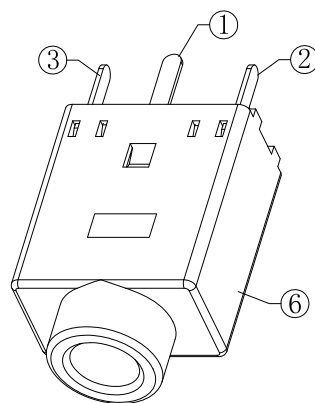

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/02/19
DATE: 05/02/19
DATE: 05/02/19

MAT'L	TITLE	JACK
FINISH	MODLE	3.5mm PHONE JACK VERTICAL TYPE
SCALE	DWG NO.	PJ-D3058-x-S124
SHEET NO.	PART NO.	PJ-D3058-x-S124

SIZE
A4
VER
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新樣式	Jack	050219