

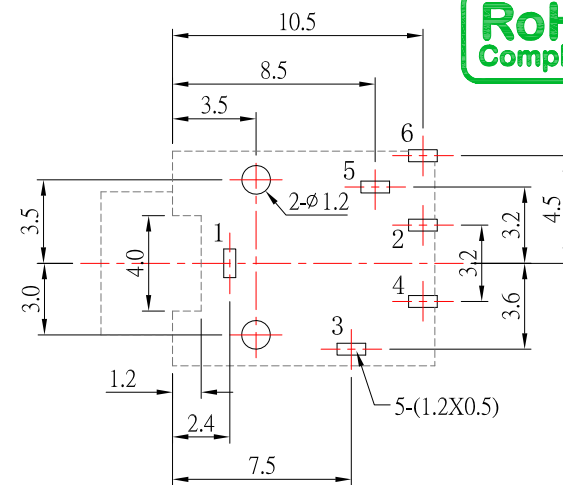
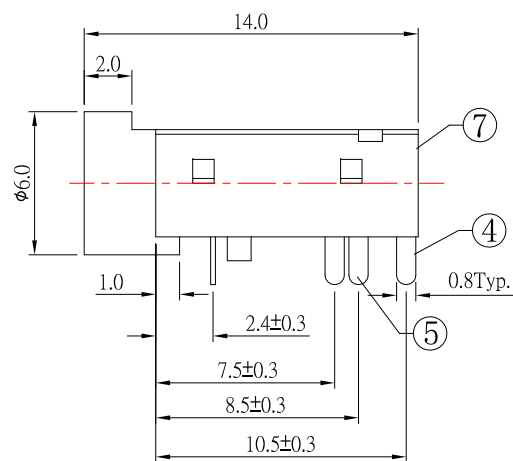
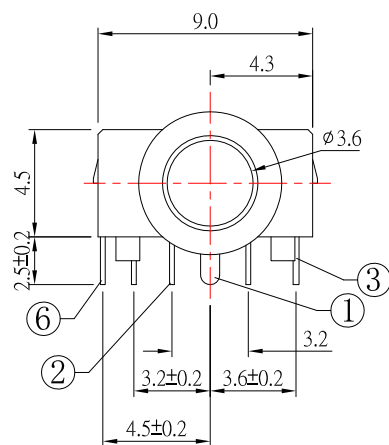
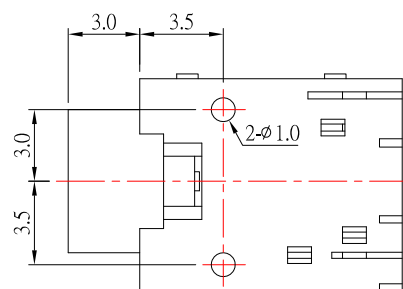


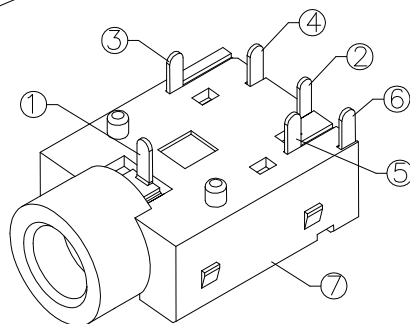


P.C.B LAYOUT
TOP VIEW



SCHEMATIC

PJ-D3053-S124



SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 250VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

7	HOUSING	1	PBT / PA9T	
6	SPRING PIECE	1	SUS	Ag-Plating
5	CONTACT FOOT	1	BRASS	Ag-Plating
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	SPRING PIECE	1	SUS301	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu	DATE 10/07/19	MAT'L		TITLE JACK
CHECKED BY: Jacky Chen	DATE 10/07/19	FINISH		MODLE PHONE JACK 常閉型 / 無外殼
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO. PJ-D3053-S124
Tony Kao	10/07/19	SHEET NO.	1 of 1	PART NO. PJ-D3053-S124
				SIZE A4
				VER R



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

1
ITEM NO

更新外型樣式
DESCRIPTION

Jack
DRAWN

100719
DATE