
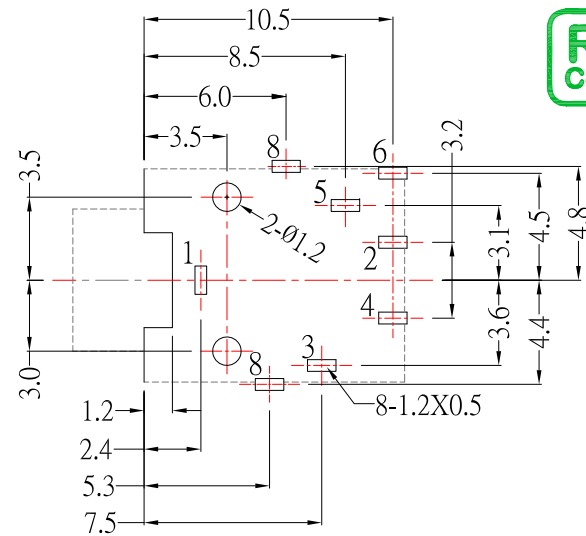
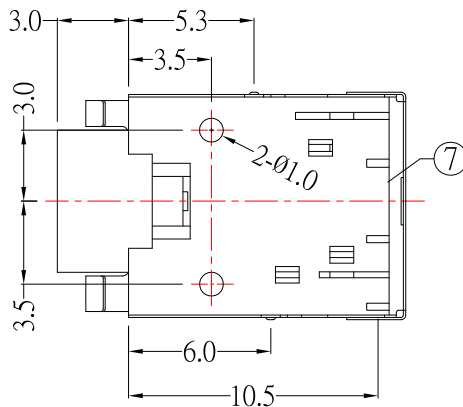
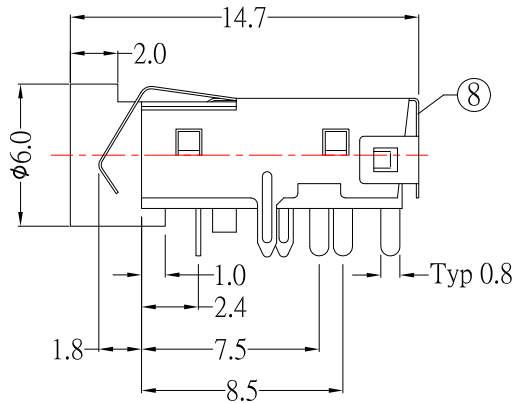


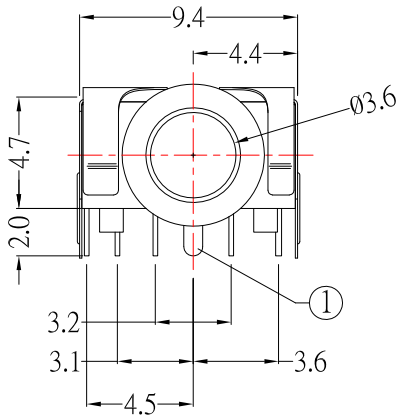


SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

SCHEMATIC

PJ-D3043H	PJ-D3043H-1	PJ-D3043H-2	PJ-D3043H-3	PJ-D3043H-4

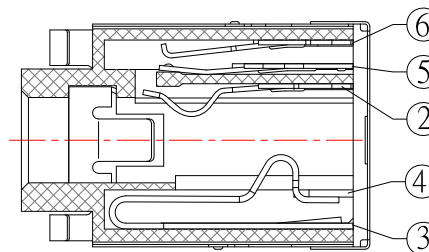

8	COAT	1	Stainless Steel	
7	HOUSHING	1	PBT	
6	CONTACT FOOT	1	Phosphor Bronze	
5	SPRING PIECE	1	Stainless Steel	
4	CURVE PIECE	1	Brass	
3	SPRING PIECE	1	Phosphor Bronze	
2	SPRING PIECE	1	Stainless Steel	
1	CONTACT FOOT	1	Phosphor Bronze	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/26/13	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-D3043H
Jacky Chen	04/26/13	1 : 1	PART NO.	PJ-D3043H
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/26/13			

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------