





CIRCUIT DIAGRAM



SCHEMATIC (NON-SHORTING)

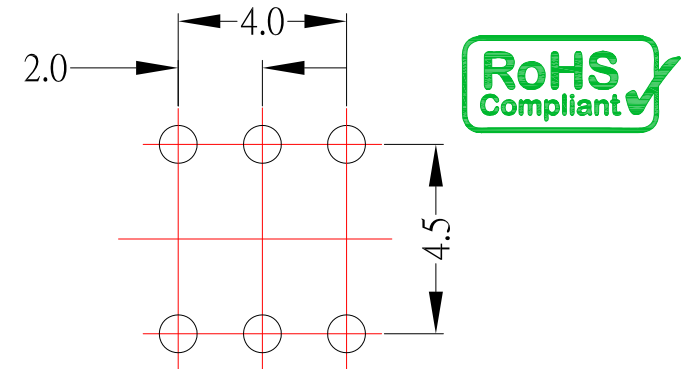

P.C.B LAYOUT MOUNTING PATTERN

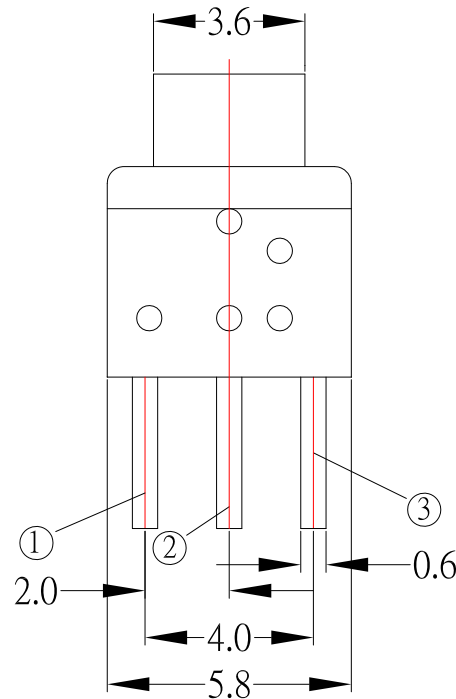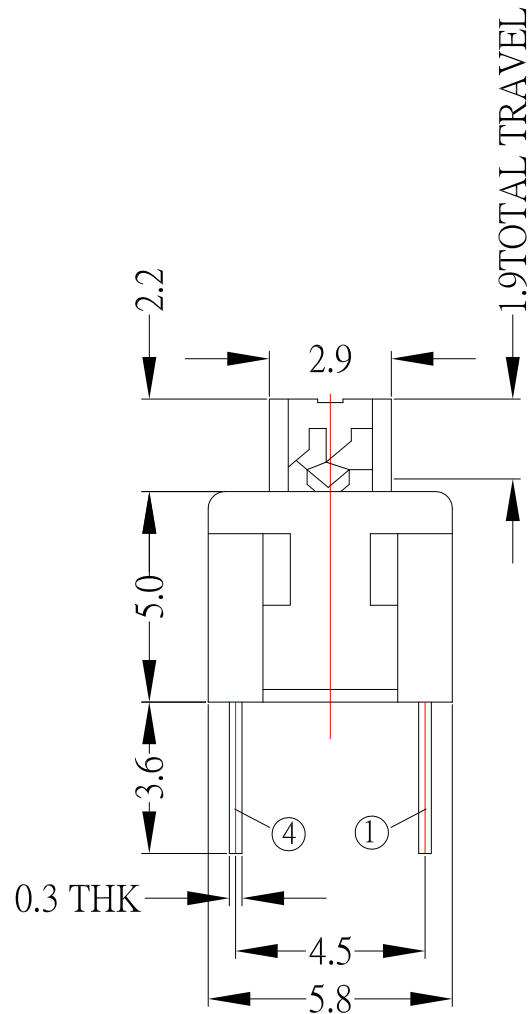

SPECIFICATIONS

Rating	30V DC / 0.1A
Circuit	2C-2P
Contact Resistance	200 mΩ MAX .
Timing	NON-SHORTING
Operating Mode	SELF-LOCK : PS-D16FL-S191 NON-LOCK : PS-D16FN-S191
Stroke	Full : 1.9mm , Lock : 1.0mm
Operating Force	SELF-LOCK :150 gf ±80
	NON-LOCK 250 gf ±80
Operating Life	10,000 CYCLES

				东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch Jack Co., Ltd.					DRAWN BY: DATE		MAT'L		TITLE	SWITCH					
									Jack Lu	01/06/15									
														CHECKED BY: DATE		FINISH		MODLE	PUSH SWITCH
									Jacky Chen		01/06/15								
2	更新Contact Resistance	Jack	010615	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°					3RD. ANGEL'S		UNITS	MM	APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	PS-D16Fx-S191	SIZE
1	Rating Update	FrankWu	030212										Tony Kao				01/06/15		
ITEM NO.	DESCRIPTION	DRAWN	DATE																
	A	B	C	D	E	F	G	H	I	J									