
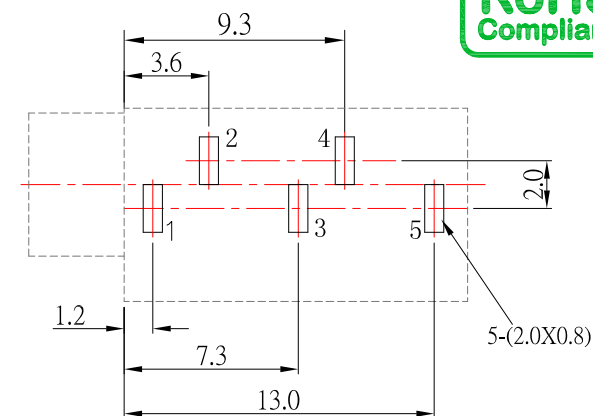
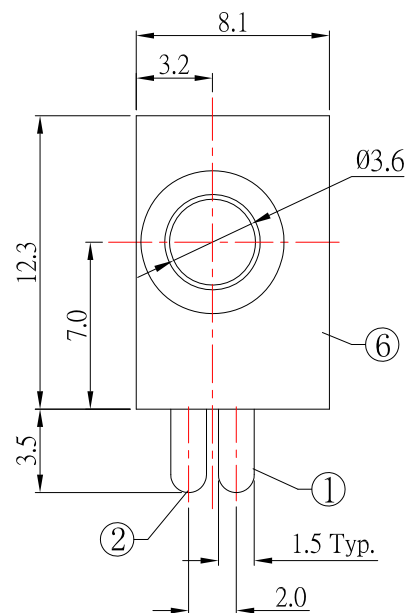


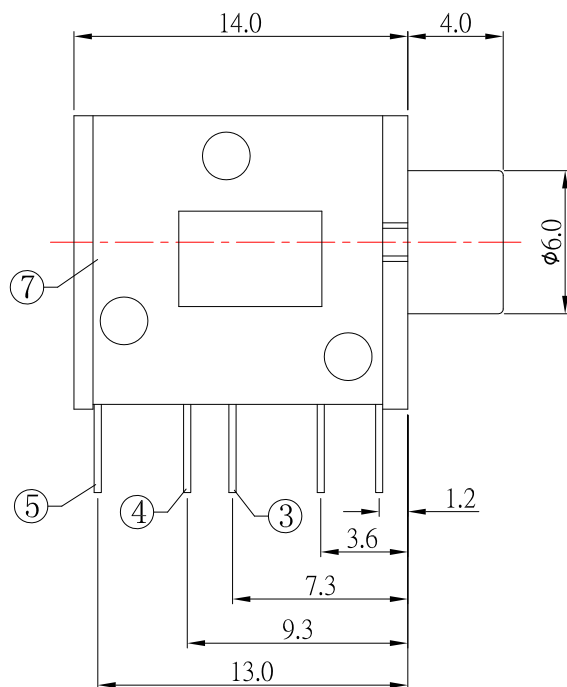

P.C.B LAYOUT  
TOP VIEW

SCHEMATIC

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance :  $\leq 0.03 \Omega$  ;
- 3.Insulation resistance :  $\geq 100M \Omega$  ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

| PJ-D3025D | PJ-D3025D-1 | PJ-D3025D-2 |
|-----------|-------------|-------------|
|           |             |             |

|              |              |           |                 |                  |
|--------------|--------------|-----------|-----------------|------------------|
| ⑦            | COVER        | 1         | PBT             |                  |
| ⑥            | HOUSING      | 1         | PBT             |                  |
| ⑤            | CURVE PIECE  | 1         | BRASS           | Sn-Plating       |
| ④            | SPRING PIECE | 1         | PHOSPHOR BRONZE | Sn-Plating       |
| ③            | CURVE PIECE  | 1         | BRASS           | Sn-Plating       |
| ②            | SPRING PIECE | 1         | PHOSPHOR BRONZE | Sn-Plating       |
| ①            | FLAT PIECE   | 1         | BRASS           | Sn-Plating       |
| NO.          | DESCRIPTION  | QTY       | MATERIAL        | PLATING          |
| DRAWN BY:    | DATE         | MAT'L     | TITLE           | JACK             |
| Jack Lu      | 11/24/17     |           |                 |                  |
| CHECKED BY:  | DATE         | FINISH    | MODLE           | PHONE JACK       |
| Jacky Chen   | 11/24/17     |           |                 |                  |
| APPROVED BY: | DATE         | SCALE     | DWG NO.         | PJ-D3025D-x-S124 |
| Tony Kao     | 11/24/17     | 1 : 1     |                 |                  |
|              |              | SHEET NO. | PART NO.        | PJ-D3025D-x-S124 |
|              |              |           |                 | SIZE             |
|              |              |           |                 | A4               |
|              |              |           |                 | VER              |
|              |              |           |                 | R1               |



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

|          |             |       |        |
|----------|-------------|-------|--------|
| 1        | 更新PLUG尺寸    | Jack  | 112417 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE   |