

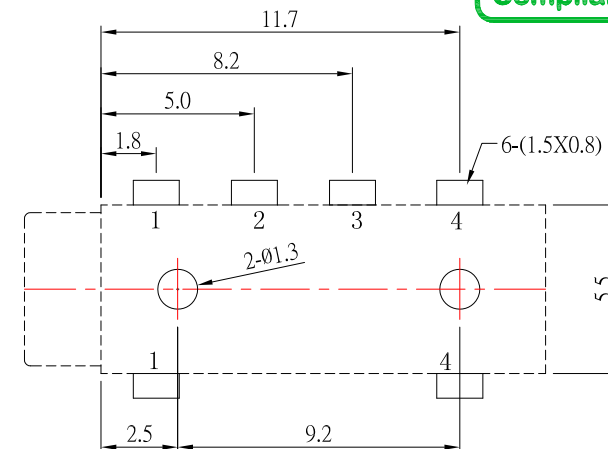
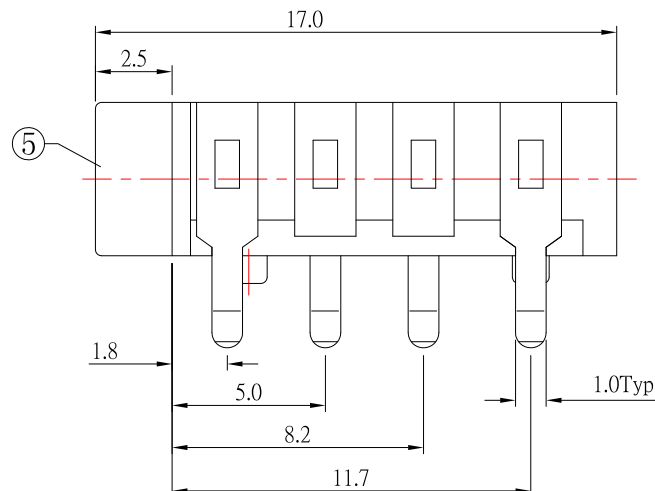
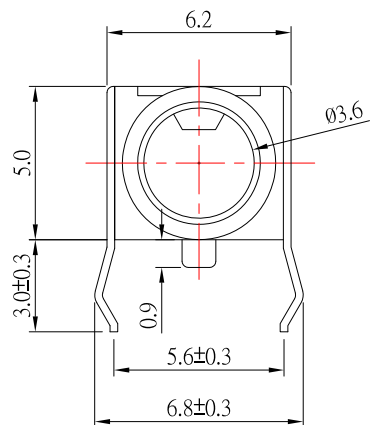



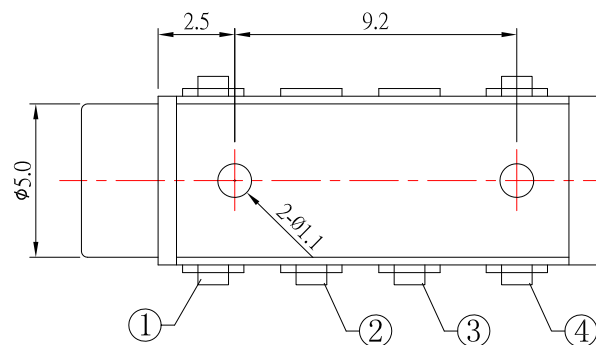

P.C.B LAYOUT
TOP VIEW

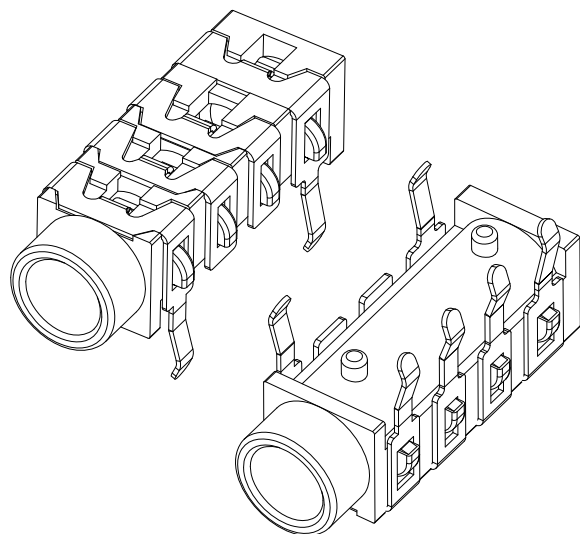

SCHEMATIC

SPECIFICATION

- 1.Rating : DC 30V 1.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

5	HOUSING	1	PBT	
4	CONTACT FOOT	1	SUS301	Sn-Plating
3	CONTACT FOOT	1	SUS301	Sn-Plating
2	CONTACT FOOT	1	SUS301	Sn-Plating
1	CONTACT FOOT	1	SUS301	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/26/14			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	06/26/14			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3013B-S125
Tony Kao	06/26/14	1 : 1		
		SHEET NO.	PART NO.	PJ-D3013B-S125
		1 of 1		
				SIZE A4
				VER R