


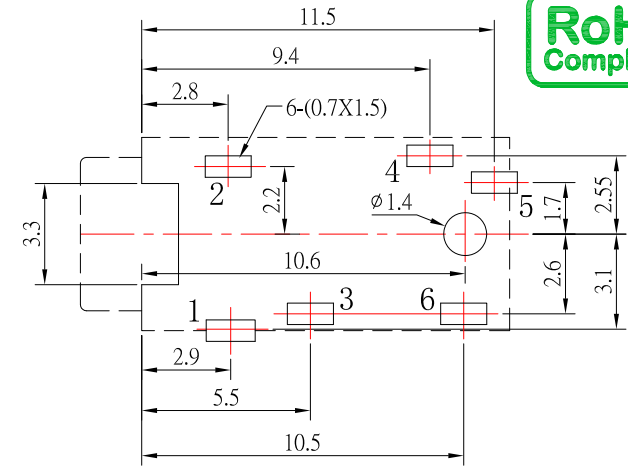
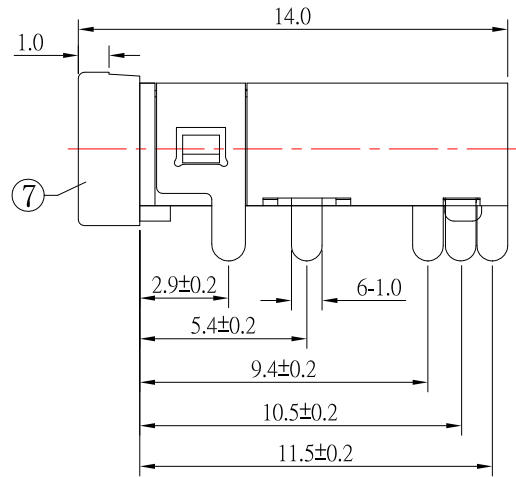
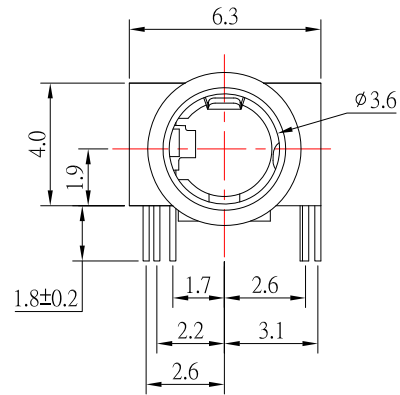


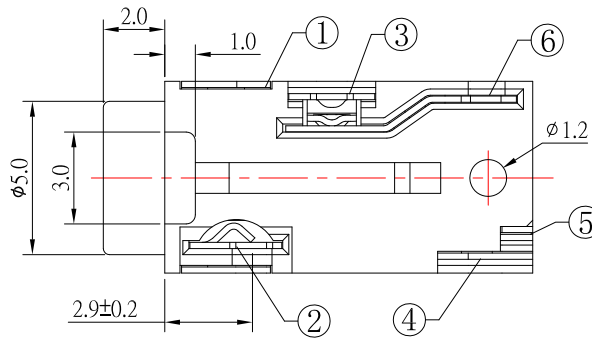

P.C.B LAYOUT
TOP VIEW

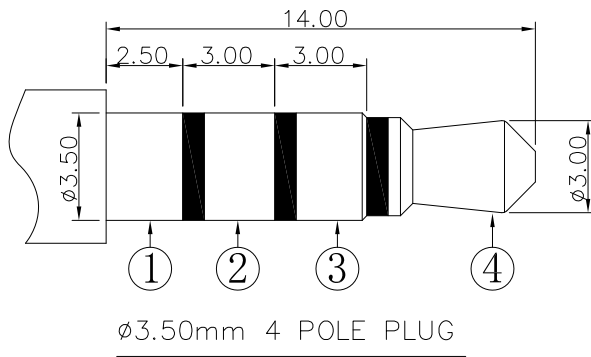

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

7	更新尺寸及材質	Jack	061219
6	更新SCHEMATIC選項	Jack	041819
5	更新SCHEMATIC選項	Jack	102517
4	更新外型樣式	Jack	083017
3	更新為A0版	Jack	051717
2	更新SCHEMATIC	Jack	051117
1	更新尺寸	Jack	090816
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

7	HOUSING	1	PPA	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu		DATE: 06/12/19	MAT'L:	TITLE: PHONE JACK
CHECKED BY: Jacky Chen		DATE: 06/12/19	FINISH:	MODLE: PJ-395x-S124
APPROVED BY: Tony Kao		DATE: 06/12/19	SCALE: 1 : 1	DWG NO. PJ-395x-S124
			SHEET NO. 1 of 1	PART NO. PJ-395x-S124
				SIZE: A4
				VER: R7