

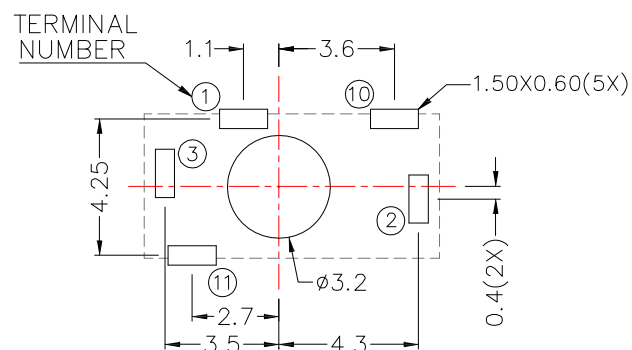
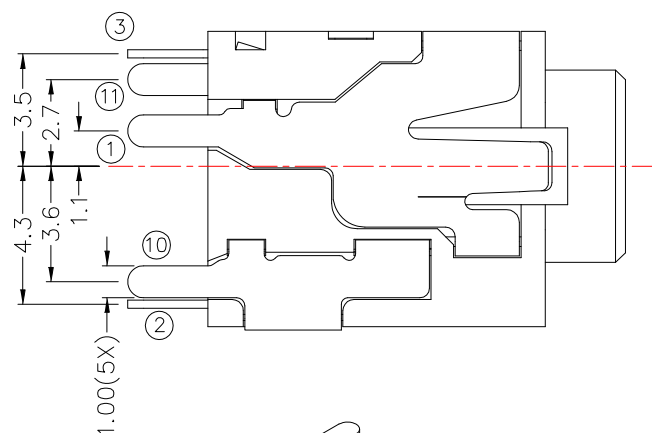
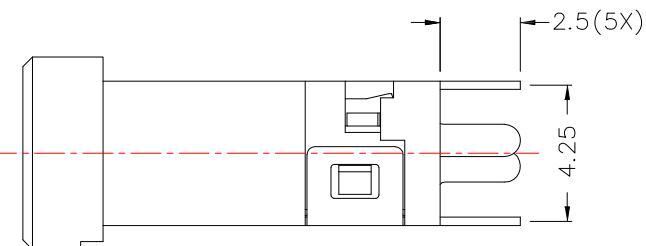
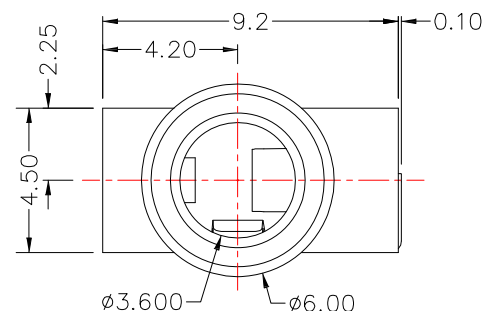


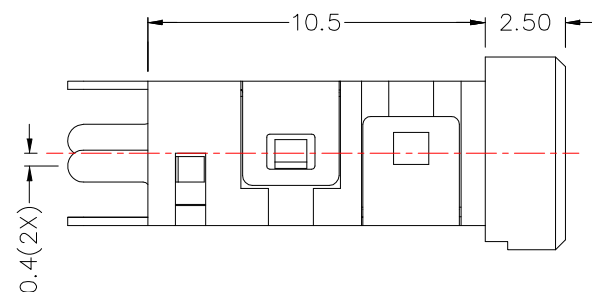

PCB LAYOUT
(BOTTOM VIEW)




SPECIFICATION

- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 10: BRASS
TERMINAL 11 : BRASS
HOUSING : PBT

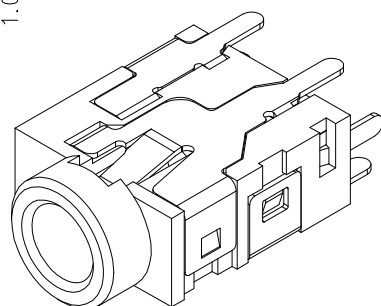

MODEL NO.	PJ-3935	PJ-3934A	PJ-3934B	PJ-3933
SCHEMATIC				



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/03/15
DATE
11/03/15
DATE
11/03/15

MAT'L
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

JACK
PHONE JACK
PJ-393x

PART NO.
PJ-393x

SIZE
A4
VER
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SPEC	Jack	110315