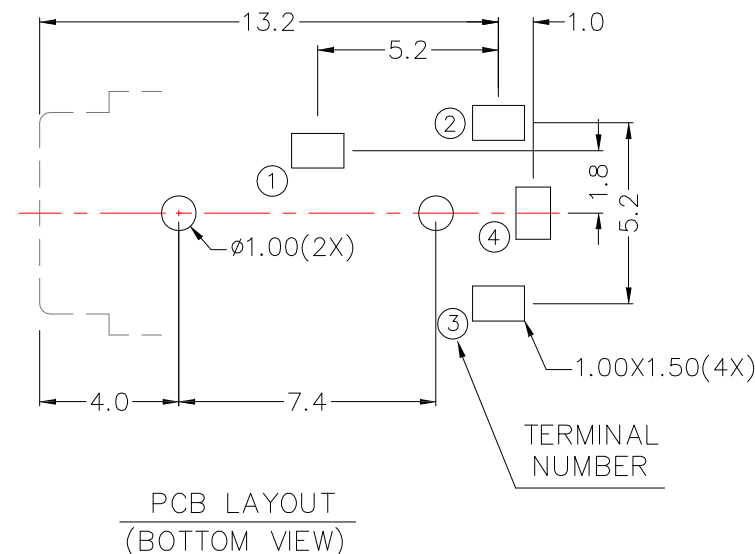
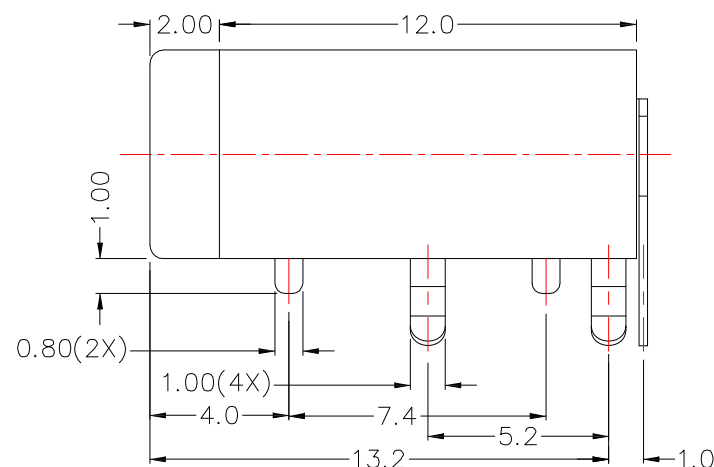
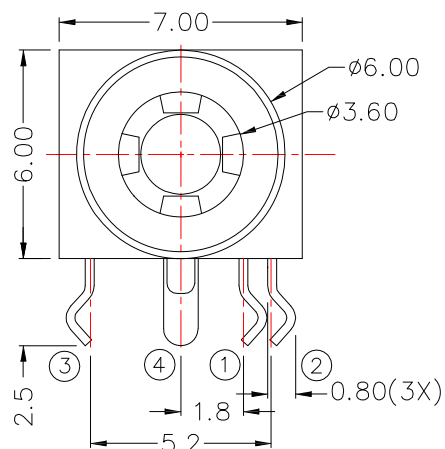


ø3.5 MATE PLUG

MODEL NO.	PJ-3724	PJ-3723
SCHEMATIC		

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
 TERMINAL 2 : PHOSPHOR BRONZE
 TERMINAL 3 : PHOSPHOR BRONZE
 TERMINAL 4 : PHOSPHOR BRONZE
 HOUSING : PBT

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles



东莞市高迪电子有限公司
 Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
 OTHERWISE STATED :

Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE

11/03/15

DATE

11/03/15

DATE

11/03/15

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

PHONE JACK

PJ-372x

PJ-372x

SIZE

A4

VER

R1