

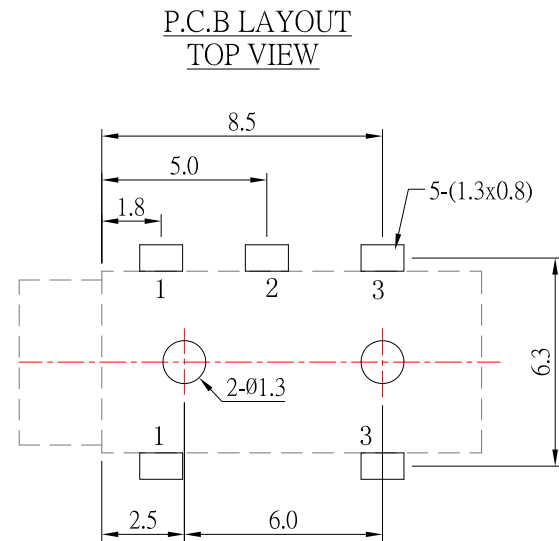
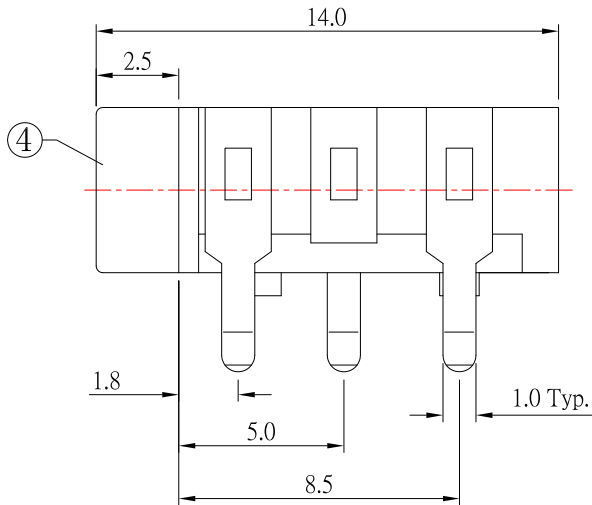



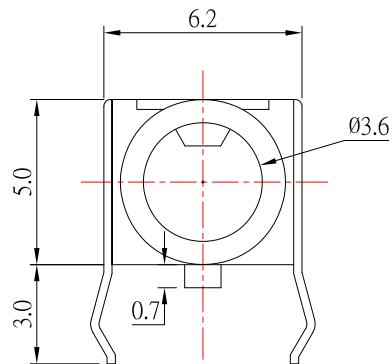


SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 50m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

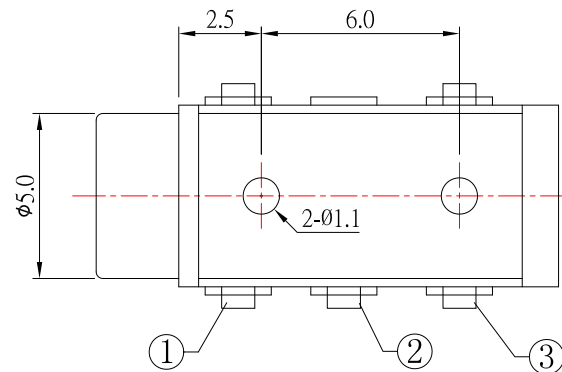

SCHEMATIC

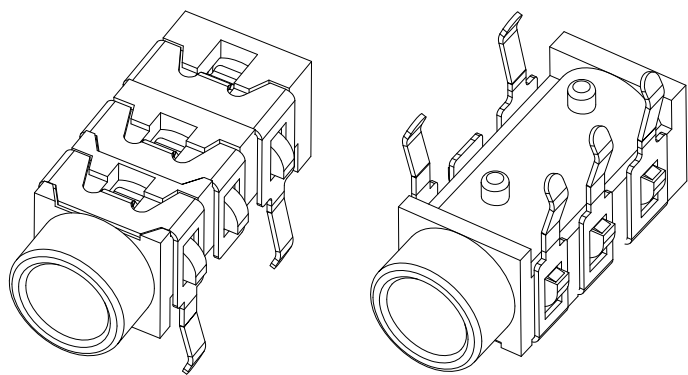

4	HOUSING	1	PBT	
3	CONTACT FOOT	1	SUS301	Sn-Plating
2	CONTACT FOOT	1	SUS301	Sn-Plating
1	CONTACT FOOT	1	SUS301	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/20/14			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	05/20/14			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-354-S125
Tony Kao	05/20/14	1 : 1		
		SHEET NO.	PART NO.	PJ-354-S125

1	更新SPEC	Jack	052014
ITEM NO.	DESCRIPTION	DRAWN	DATE