


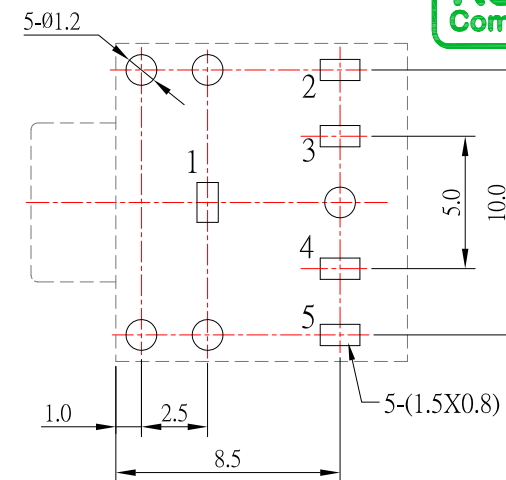
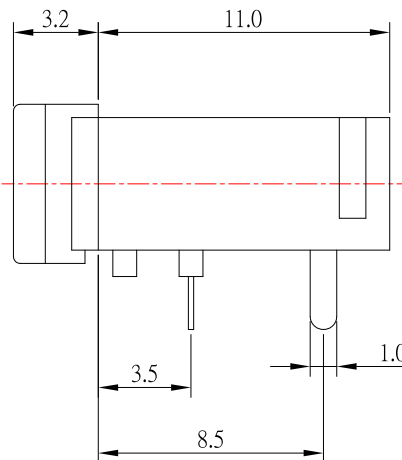
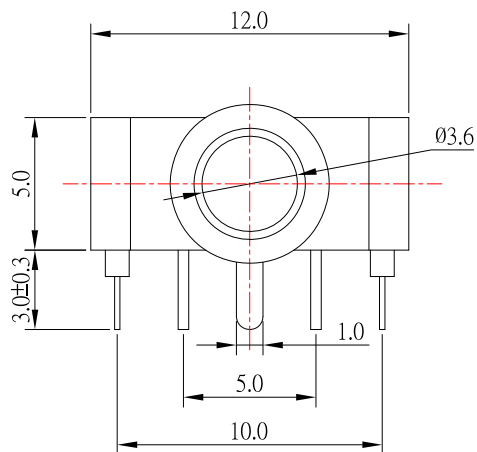


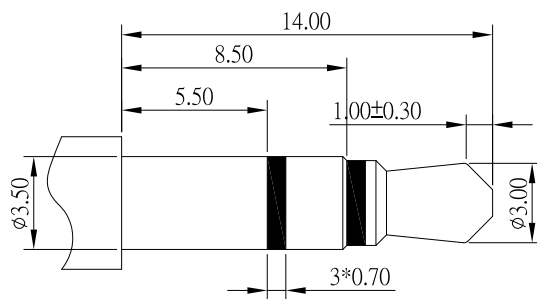

P.C.B LAYOUT
TOP VIEW

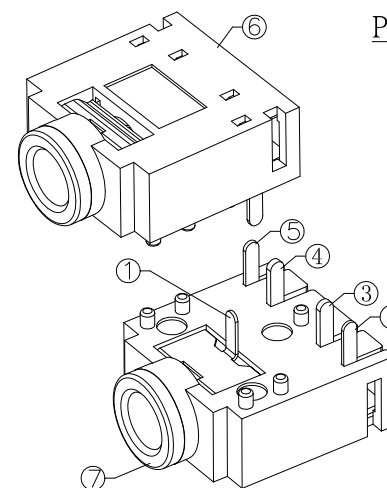

ø3.50mm 3 POLE PLUG

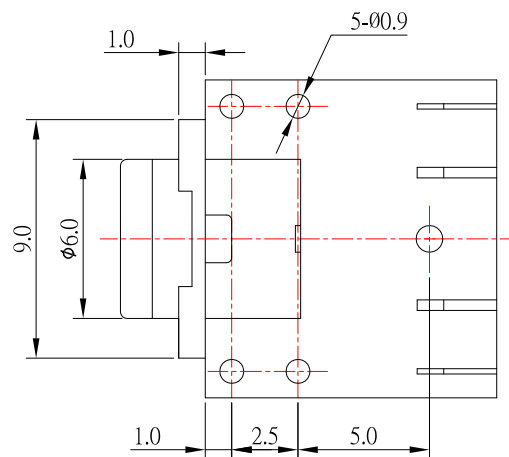

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

SCHEMATIC

PJ-3515	PJ-3514B	PJ-3514A	PJ-3513

7	AXIS SUPPORT	1	BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	SUS	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

[illegible]

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	04/25/17	FINISH		MODLE	PHONE JACK	
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-351x-S124	SIZE
Jacky Chen	04/25/17					A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	PJ-351x-S124	VER
Tony Kao	04/25/17					B