
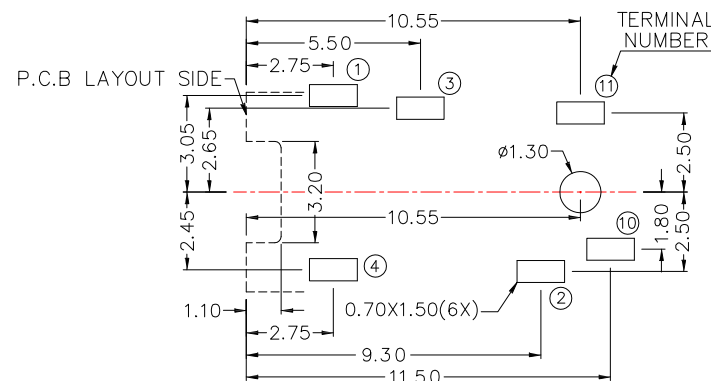
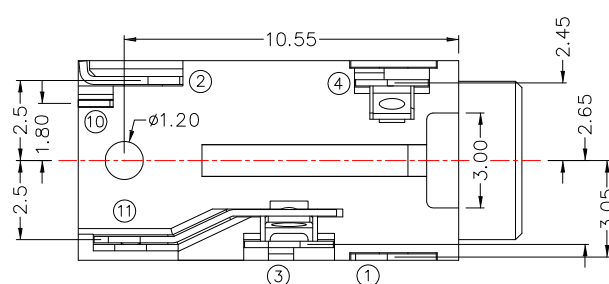
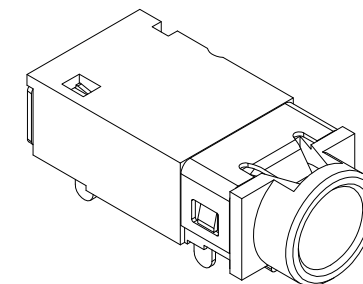
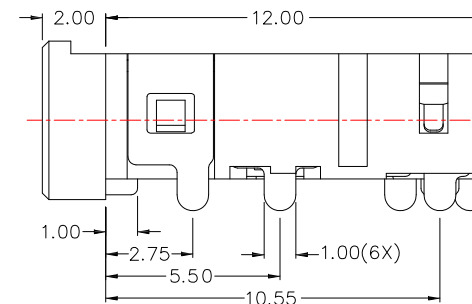



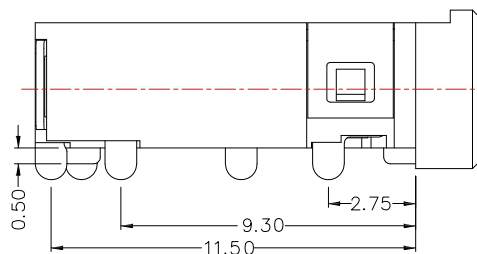


RECOMMENDED
(BOTTOM VIEW)

SPECIFICATION

1. Rating:DC 12V 1.0A
2. Contact resistance: $\leq 50\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V)
4. Withstand voltage:500VAC
5. Insertion and extraction force:3-20N
6. life test:5,000 cycles

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10: PHOSPHOR BRONZE
TERMINAL 11: PHOSPHOR BRONZE
HOUSING : PA66



MODEL NO.	PJ-3956-2	PJ-3955A-2	PJ-3955B-2	PJ-3954-2
SCHEMATIC				



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 11/07/13
DATE: 11/07/13
DATE: 11/07/13

MAT'L	TITLE	JACK
FINISH	MODLE	PHONE JACK
SCALE	DWG NO.	PJ-395x-2
SHEET NO.	PART NO.	PJ-395x-2

SIZE
A4
VER
R