

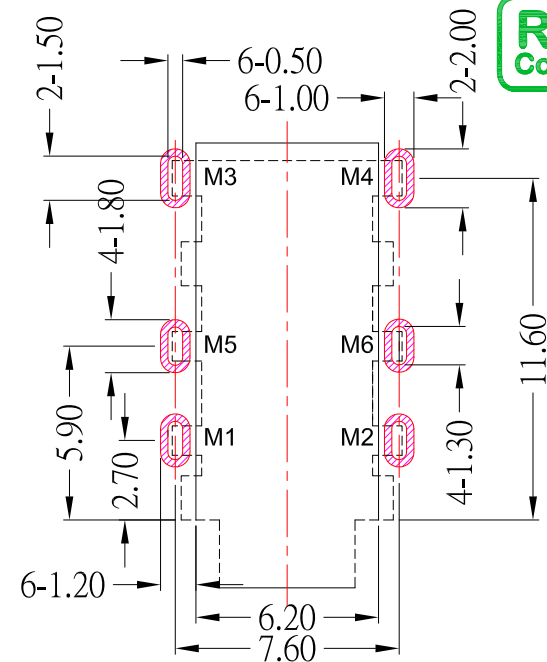
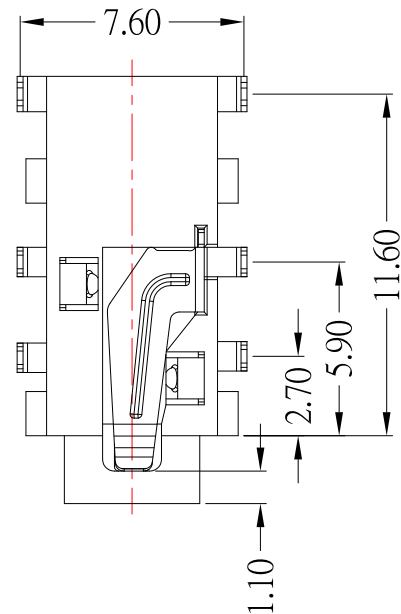
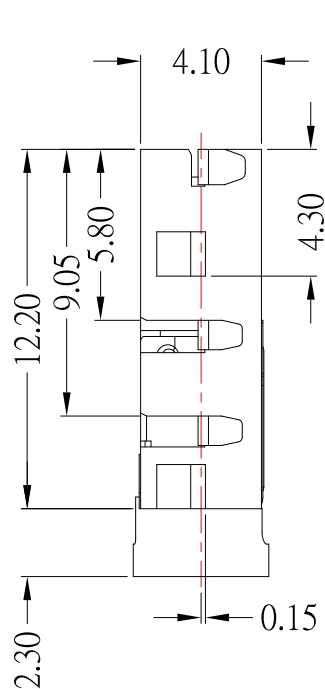
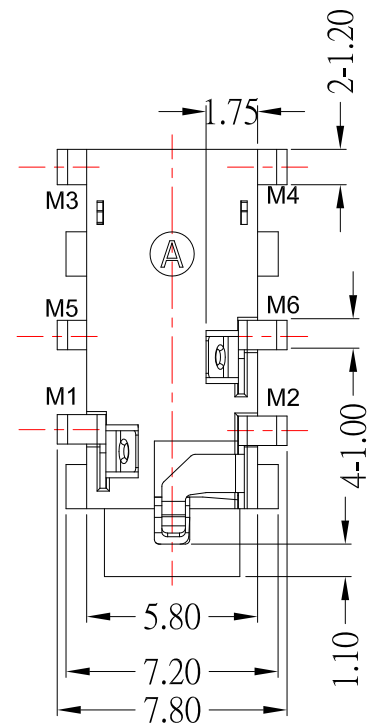


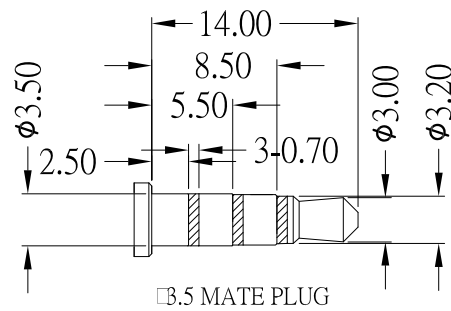

P.C.B LAYOUT
TOP VIEW

MODEL NO.	PJ-5356D
SCHEMATIC	

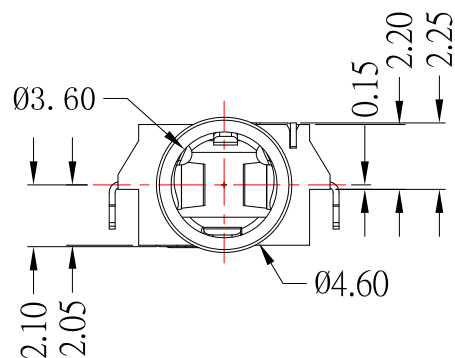

Ø3.5 MATE PLUG

SPECIFICATIONS:

- 1.CURRENT RATING: 0.3A,16V DC.
- 2.CONTACT RESISTANCE: 30mΩ MAX.
- 3.INSULATION RESISTANCE: 100MΩ MIN AT 500V DC.
- 4.WITHSTAND VOLTAGE: AC 500V/ 1 MINUTE.
- 4.OPERATING TEMPERATURE RANGE: -25°C TO +85°C.
5. INSERTION FORCE: 0.4~3.0Kgf.
6. EXTRACTION FORCE: 0.4~3.0Kgf.

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY
⑦	TERMINAL M6	PHOSPHOR BRONZE	Gold Plated	1
⑥	TERMINAL M5	PHOSPHOR BRONZE	Gold Plated	1
⑤	TERMINAL M4	PHOSPHOR BRONZE	Gold Plated	1
④	TERMINAL M3	PHOSPHOR BRONZE	Gold Plated	1
③	TERMINAL M2	PHOSPHOR BRONZE	Gold Plated	1
②	TERMINAL M1	PHOSPHOR BRONZE	Gold Plated	1
①	HOUSING	PA9T		1



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

09/14/16

CHECKED BY:

Jacky Chen

DATE

09/14/16

APPROVED BY:

Tony Kao

DATE

09/14/16

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

PHONE JACK

PJ-5356D-S214

PJ-5356D-S214

SIZE

A4

VER

A0