

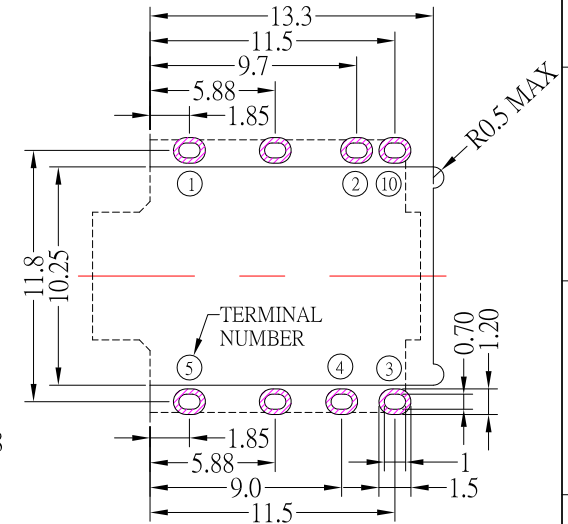
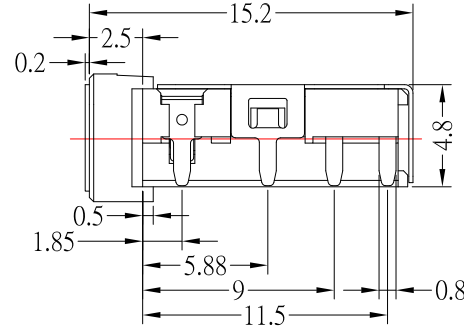
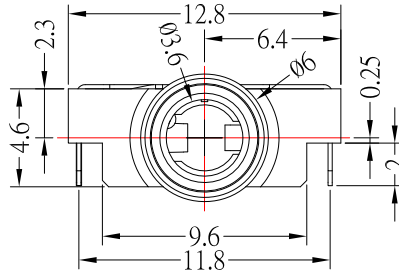
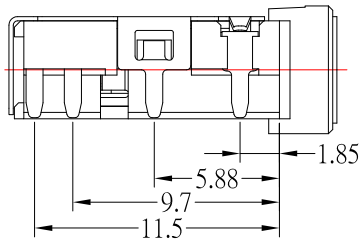




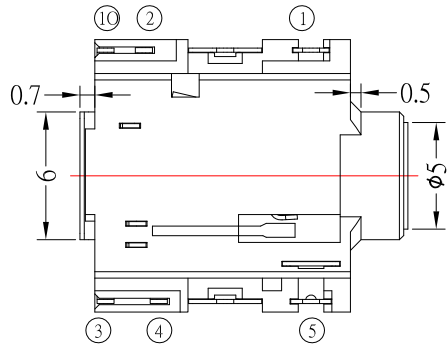

SCHEMATIC



* MATERIAL

TERMINAL 1	:COPPER ALLOY
TERMINAL 2	:COPPER ALLOY
TERMINAL 3	:COPPER ALLOY
TERMINAL 4	:COPPER ALLOY
TERMINAL 5	:COPPER ALLOY
TERMINAL 10	:COPPER ALLOY
SHIELD	:COPPER ALLOY
BUSHING	:BRASS
HOUSING	:PA6T

SPECIFICATIONS

Rating	DC 30V 0.5A ;
Contact Resistance	$\leq 0.03 \Omega$;
Insulation Resistance	$\geq 100M \Omega$ (DC250V) ;
Withstand voltage	500VAC
Insertion and extraction force	3~20N
Life test	5,000 cycles



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 10/08/12

CHECKED BY: DATE

Jacky Chen 10/08/12

APPROVED BY: DATE

Tony Kao 10/08/12

MAT'L

FINISH

SCALE

SHEET NO.

TITLE JACK

MODLE PHONE JACK

DWG NO. PJ-5166DS

PART NO. PJ-5166DS

SIZE

A4

VER

R