
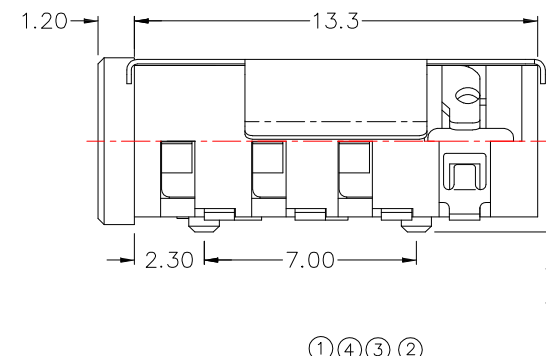
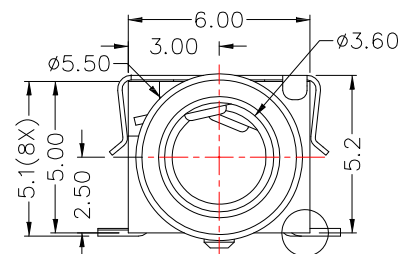
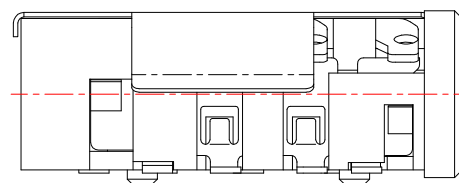
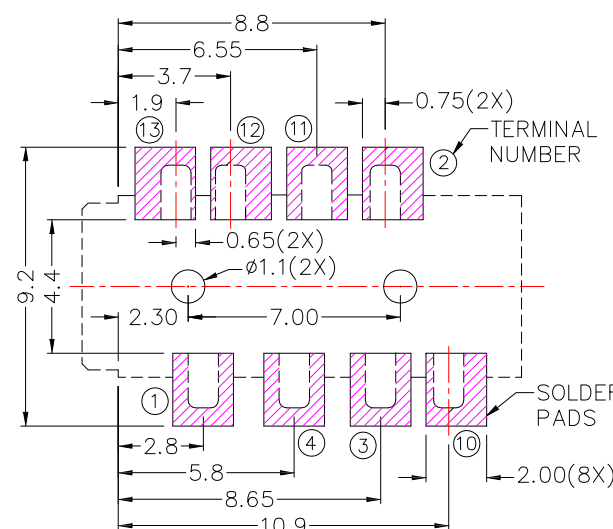


MODEL NO.	PJ-5108DS1
SCHEMATIC	

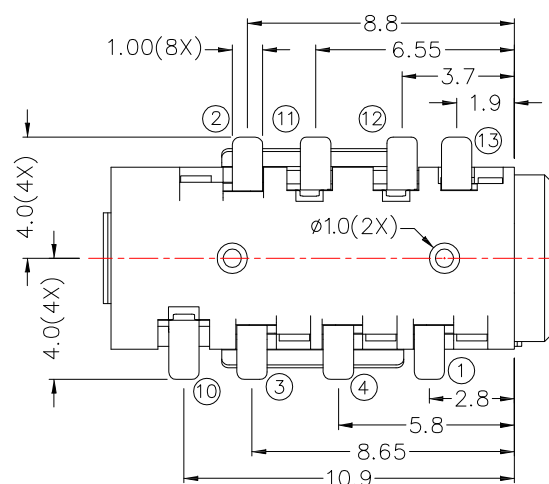

SPECIFICATION

- Rating : DC 12V 1.0A
- Contact resistance : $\leq 50m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
 TERMINAL 2 : PHOSPHOR BRONZE
 TERMINAL 3 : PHOSPHOR BRONZE
 TERMINAL 4 : PHOSPHOR BRONZE
 TERMINAL 10 : PHOSPHOR BRONZE
 TERMINAL 11 : PHOSPHOR BRONZE
 TERMINAL 12 : PHOSPHOR BRONZE
 TERMINAL 13 : PHOSPHOR BRONZE
 SHIELD : STAINLESS STEEL
 HOUSING : PA10T



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ± 0.2
 Above 5 ~ 15 ± 0.3
 Above 15 ~ 30 ± 0.4
 Above 30 ~ 50 ± 0.5
 Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE: 08/13/19
 DATE: 08/13/19
 DATE: 08/13/19

MAT'L
 FINISH
 SCALE: 1 : 1
 SHEET NO.: 1 of 1

TITLE: JACK
 MODLE: PHONE JACK
 DWG NO.: PJ-5108DS1
 PART NO.: PJ-5108DS1

SIZE: A4
 VER: R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新材質	Jack	081319
1	新增SPEC	Jack	062916