


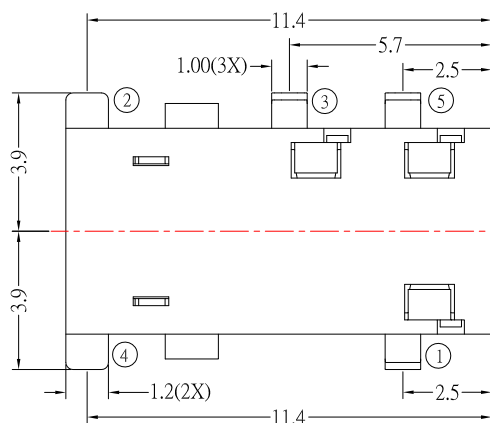
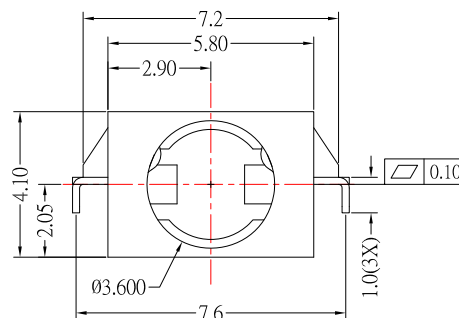


- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

TERMINAL 1	:PHOSPHOR BRONZE(Matte Gold Plated)
TERMINAL 2	:PHOSPHOR BRONZE(Matte Gold Plated)
TERMINAL 3	:PHOSPHOR BRONZE(Matte Gold Plated)
TERMINAL 4	:PHOSPHOR BRONZE(Matte Gold Plated)
TERMINAL 5	:PHOSPHOR BRONZE(Matte Gold Plated)
HOUSING	:PA6T

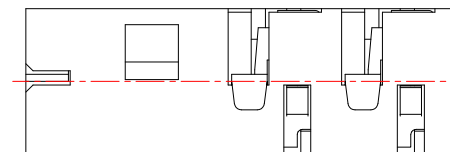

Ø 3.5 MATE PLUG

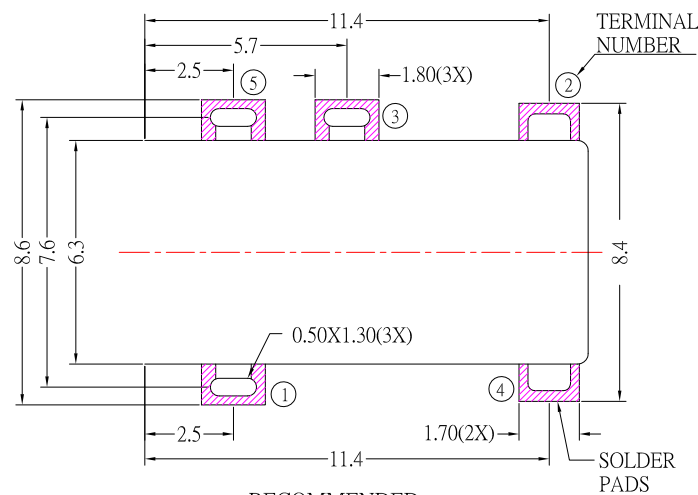

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	01/07/16
CHECKED BY:	DATE
Jacky Chen	01/07/16
APPROVED BY:	DATE
Tony Kao	01/07/16

DATE
01/07/16
DATE
01/07/16
DATE
01/07/16

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

	TITLE
	MODLE
	DWG NO.
	PART NO.

JACK
3.5mm PHONO
PJ-5055D-H
PJ-5055D-H

NE JACK 端

子腳鍍金	
	SIZE
	A4
	VE
	A2

2	新增端子腳鍍層	Jack	010716
1	新增SPEC	Jack	110315
ITEM NO.	DESCRIPTION	DRAWN	DATE