

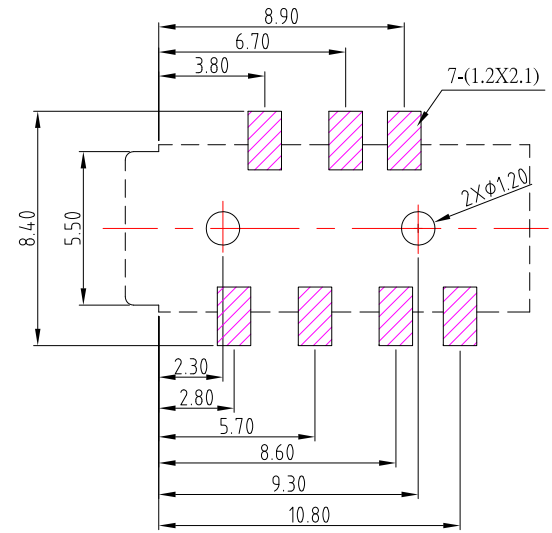
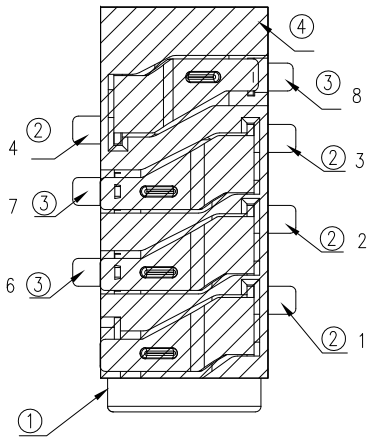
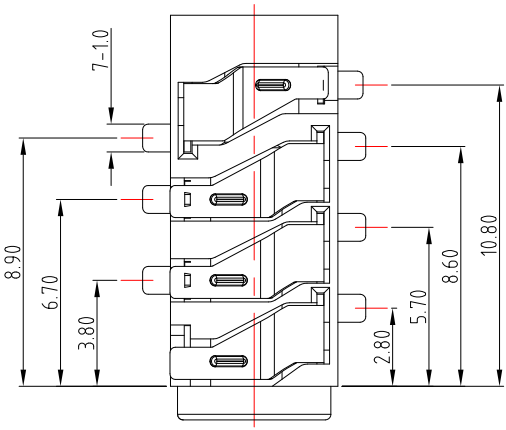
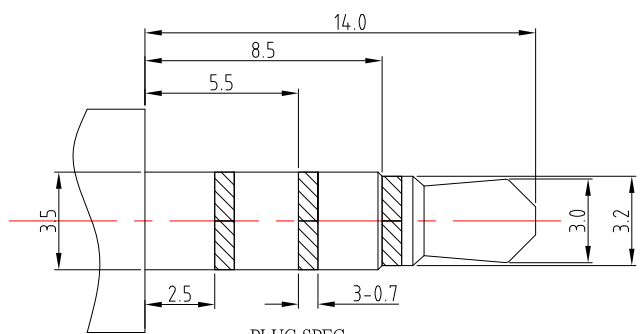


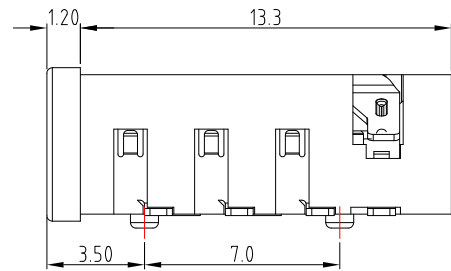

P.C.B LAYOUT
TOP VIEW



PLUG SPEC

Model No.	PJ-3917D-S214
Schematic code	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
100mΩ MAX. (FINAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - PLUG INSERTION FORCE : 0.3~3.0KGS .
 - PLUG WITHDRAWAL FORCE : 0.3~3.0KGS .
- DURABILITY TEST: 5,000 CYCLES .

④	MYLAR			1
③	CONTACT 2	PHOSPHOR BRONZE	GOLD FLASH	3
②	CONTACT 1	PHOSPHOR BRONZE	GOLD FLASH	4
①	HOUSING	PA9T	BLACK	1
ITEM	DESCRIPTIONs	MATERIAL		Q'TY

5	更新圖面	Jack	042320
4	更新圖面	Jack	041420
3	更新尺寸	Jack	051618
2	更新料號	Jack	091416
1	新增電路選項	Jack	031016
ITEM NO	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/23/20			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/23/20			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-3917D-S214
Tony Kao	04/23/20	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-3917D-S214
				SIZE A4
				VER R5