

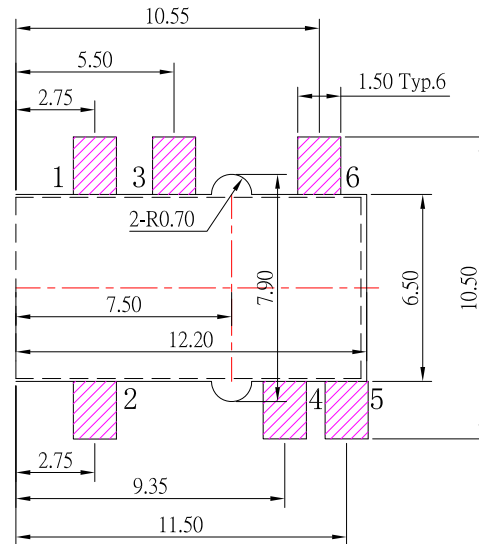
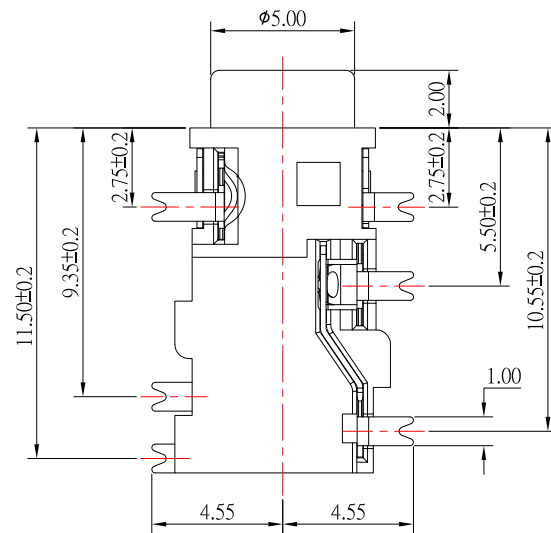
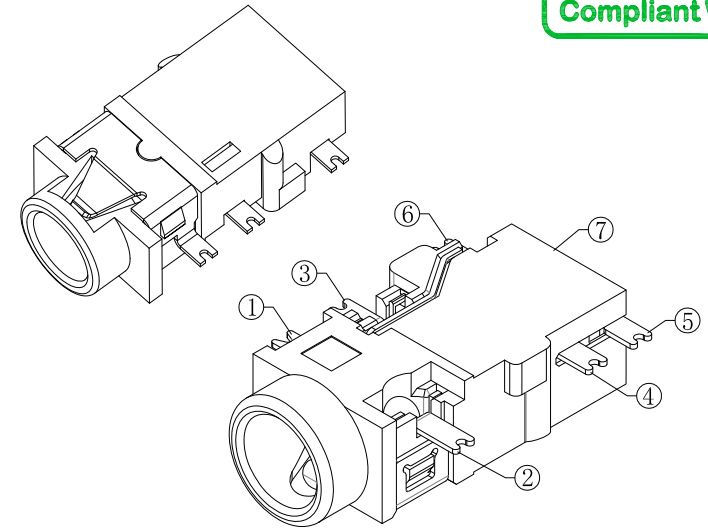
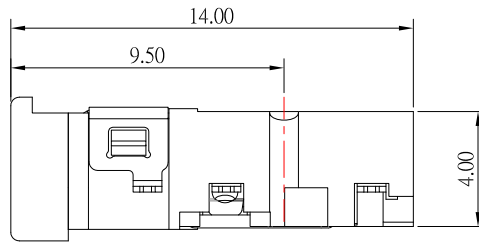


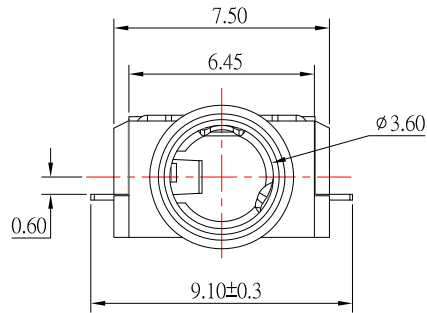

P.C.B LAYOUT
TOP VIEW

SCHEMATIC



SPECIFICATION

- Rating : DC 30V, 0.5A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles °

⑦	HOUSING	1	PPA	
⑥	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
⑤	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/28/19			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	05/28/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3118-x-S124
Tony Kao	05/28/19	1 : 1		
		SHEET NO.	PART NO.	PJ-S3118-x-S124
		1 of 1		
				SIZE A4
				VER R5

5	新增PLUG標號	Jack	052819
4	更新圖面	Jack	052419
3	新增3d上方圖	Jack	101918
2	更新圖面	Jack	092818
1	新增尺寸	Jack	070717
ITEM NO.	DESCRIPTION	DRAWN	DATE