
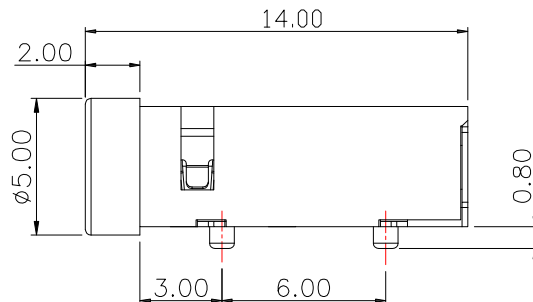
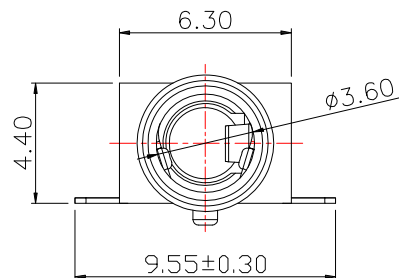
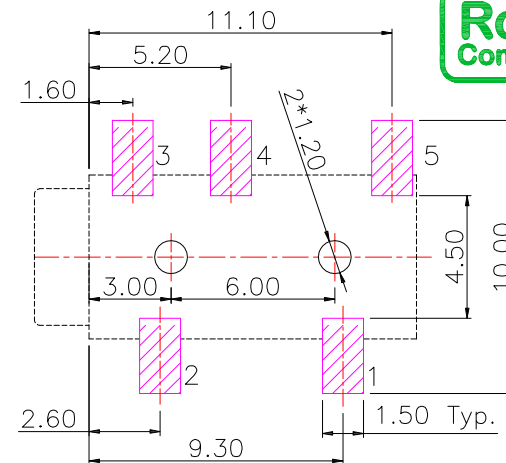


Ø3.50mm 3 POLE PLUG

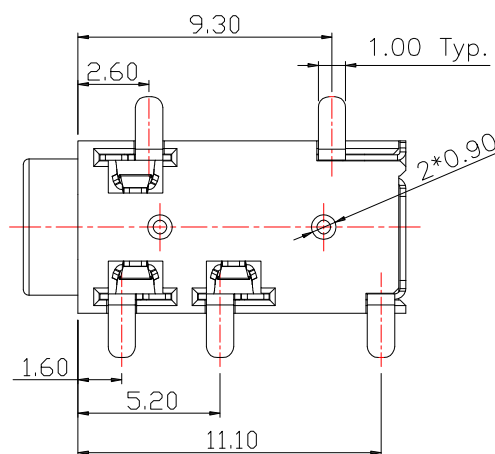


P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

SCHEMATIC

PJ-S3127	PJ-S3127-1	PJ-S3127-5

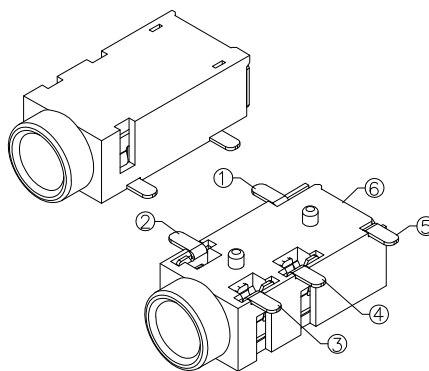

6	HOUSING	1	PA9T	
5	CONTACT FOOT#4	1	PHOSPHOR BRONZE	Au-Plating
4	CONTACT FOOT#3	1	PHOSPHOR BRONZE	Au-Plating
3	CONTACT FOOT#2	1	PHOSPHOR BRONZE	Au-Plating
2	CONTACT FOOT#1	1	PHOSPHOR BRONZE	Au-Plating
1	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/30/17	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S3127-x-S124
Jacky Chen	08/30/17	1 : 1	PART NO.	PJ-S3127-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	08/30/17			

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增plug對應pin位置	Jack	083017
1	更新為A0版	Jack	052417