




DIMENSIONS



P.C.B MOUNTING PATTERN





SCHEMATIC

NOTE:

1. PS-D12L-S191: SELF-LOCK
2. PS-D12NL-S191:NON-LOCK

TOTAL TRAVEL 2.0
LOCK TRAVEL 1.0

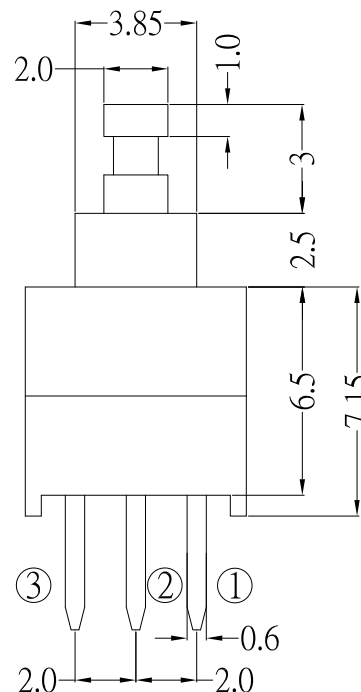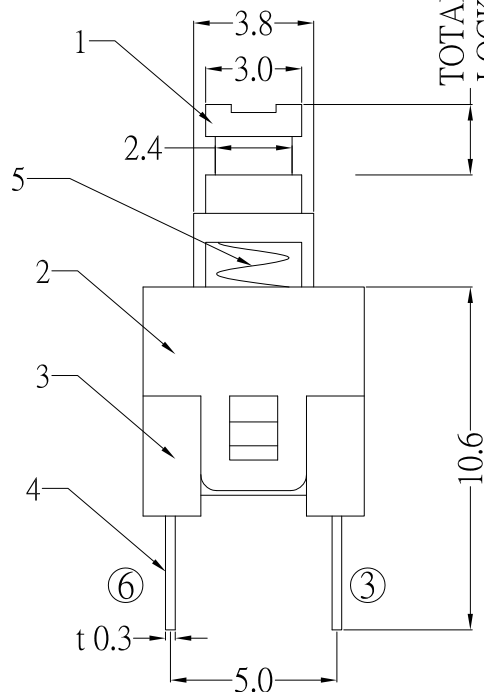

SPECIFICATIONS

1. Rating : DC 30V 0.1A
2. Circuit : 2P2T
3. Timing : Non-Shorting
4. Operating force : 160 ± 50 gf
5. Life test : 10,000 cycles

6	CONTACT(CLIP)	2	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	STEEL	
4	TERMINAL	6	BRASS	Ag-Plated
3	BOTTOM CASE	1	PA66	BLACK
2	COPING CASE	1	PA66	WHITE
1	KNOB	1	POM	GREEN
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/23/15			
CHECKED BY:	DATE	FINISH	MODLE	PUSH SWITCH
Jacky Chen	10/23/15			
APPROVED BY:	DATE	SCALE	DWG NO.	PS-D12x-S191
Tony Kao	10/23/15	1 : 1		
		SHEET NO.	PART NO.	PS-D12x-S191
		1 of 1		
				SIZE A4
				VER R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增SPEC	Jack	102315
1	新增PIN編號	Jack	101215