

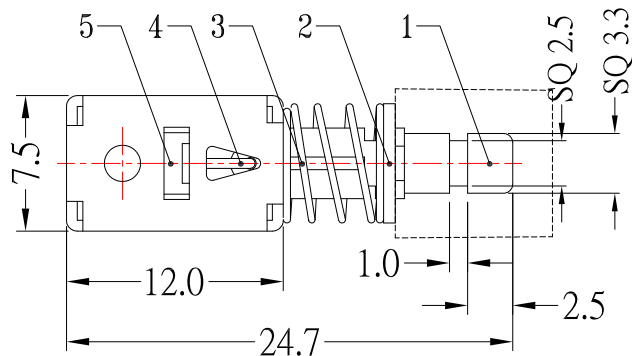


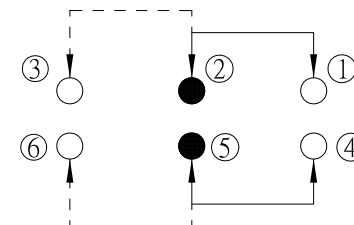



P.C.B LAYOUT MOUNTING PATTERN
BOTTOM VIEW

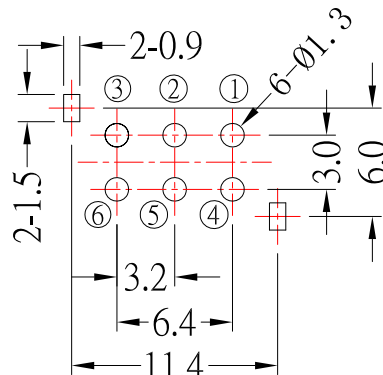

SCHEMATIC (NON-SHORTING)

3.5 TOTAL TRAVEL

2.5±0.3 LOCK TRAVEL

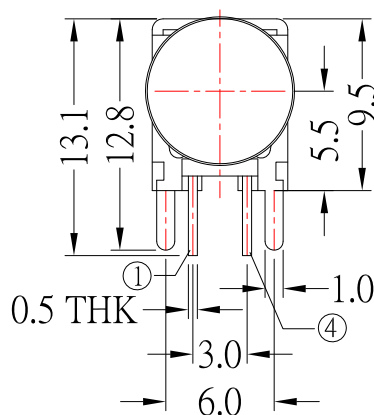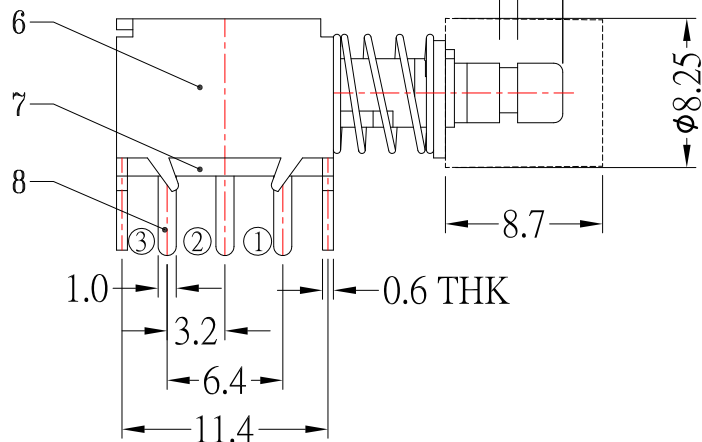

SPECIFICATIONS:

- 1.Rating: DC 12V 3.0A
- 2.Insulation Resistance: 100 MΩ Min/DC 500V
- 3.Function: Non-Shorting
- 4.Contact Resistance: 30 mΩ Max
- 5.Withstand Voltage: AC 500V / 1 Min
- 6.Operating Mode: Self-Lock

9	CONTACT CLIP	PBS	2	Ag PLATED
8	TERMINAL	BRASS	6	Ag PLATED OVER Ni PLATED
7	BASE	PHENOLIC RESIN	1	NATURAL
6	FRAME	SPCC	1	Ni PLATED
5	SPRING PLATE	PBS	1	NATURAL
4	CAM STICK	PBS	1	NATURAL
3	SPRING	STAINLESS STEEL	1	Ni PLATED
2	BLOCK	STAINLESS STEEL	1	Ni PLATED
1	KNOB	PA66	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu

DATE: 03/30/15

CHECKED BY: Jacky Chen

DATE: 03/30/15

APPROVED BY: Tony Kao

DATE: 03/30/15

MAT'L

TITLE

SWITCH

FINISH

MODLE

PUSH SWITCH

SCALE

1 : 1

DWG NO.

PS-22F433+C102-K

SIZE

A4

VER

R4

4	新增SCHEMATIC中PIN編號	Jack	033015
3	新增PIN編號	Jack	032515
2	新增Operating Mode	Jack	072814
1	新增PCB LAYOUT尺寸	Jack	051414
ITEM NO.	DESCRIPTION	DRAWN	DATE