
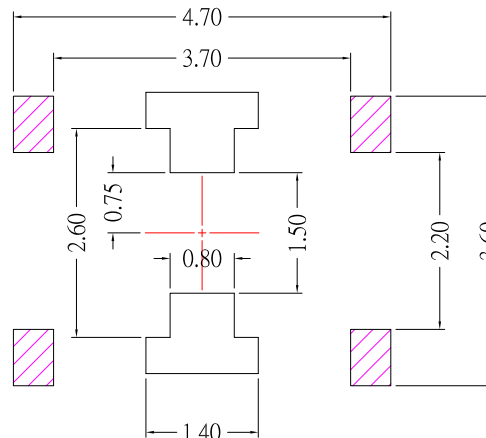
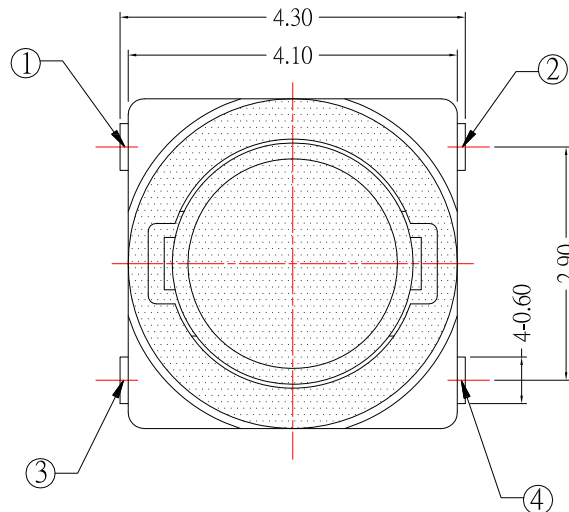



P.C.B LAYOUT MOUNTING PATTERN

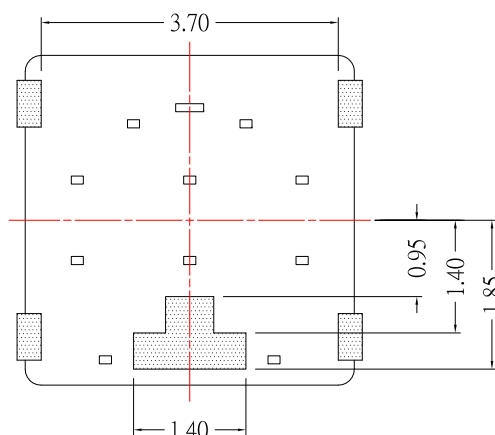

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 15V 20mA			
Circuit	1C - 1P			
Contact Resistance	100mΩ Max.			
Travel	0.2 ± 0.1mm			
Operating Force	0	100 ± 50gf	2	160 ± 50gf
	3	250 ± 50gf	4	350 ± 50gf
Operating Life (cycles)	300,000			100,000

4	CASE	LCP	1	
3	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
2	CONTACT	STAINLESS STEEL	1 or 2	Ag PLATED
1	DUST COVER	PI FILM	1	
No	PARTS NAME	MATERIAL	QTY	FINISH



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/29/14			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	12/29/14			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A98MU-x-S100
Tony Kao	12/29/14	1 : 1		
		SHEET NO.	PART NO.	TS-A98MU-x-S100
		1 of 1		
				SIZE
				A4
				VER
				R1