


P.C.B LAYOUT MOUNTING PATTERN

SCHEMATIC (NON-SHORTING)

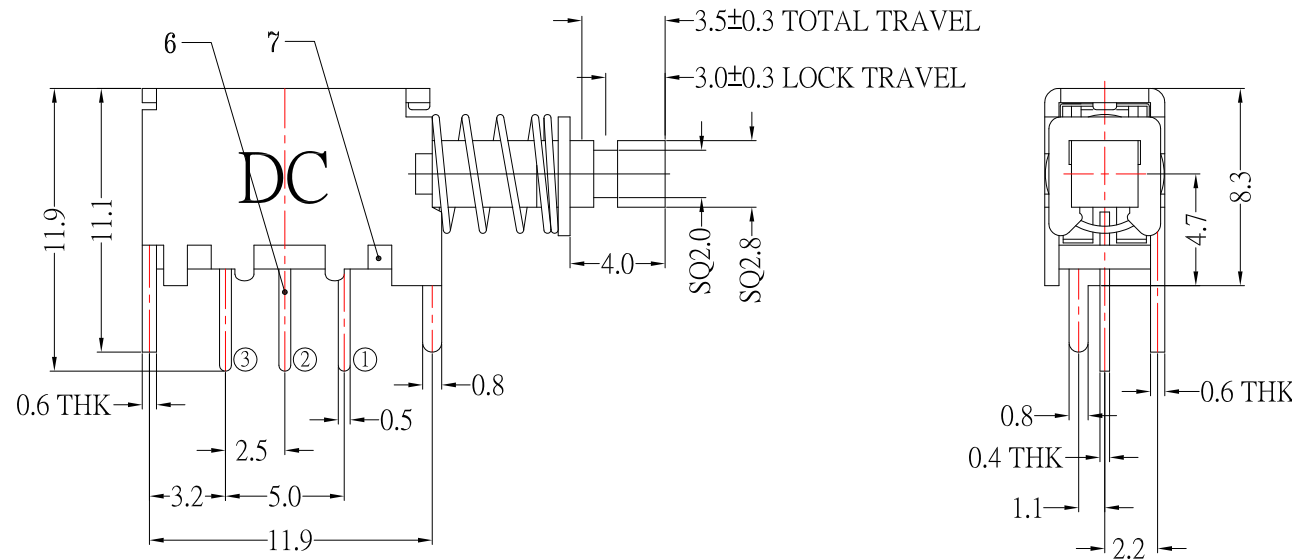

SPECIFICATIONS

- 1. Rating : DC50V 0.3A
- 2. Circuit : 1P2T
- 3. Timing : Non-Shorting
- 4. Operating force : 250 ± 100gf
- 5. Life test : 10,000 cycles
- 6. Operating Mode : Self-Lock

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
9	Contact Clip	1	Phosphor Bronze	Ag-Plating
8	Spring Plate	1	PBS	Natural
7	Base	1	Phenolic Resin	Natural
6	Terminal	1	Brass	Ag-Plating
5	Knob	1	PA66	Blue
4	Block	1	Stainless Steel	Ni-Plating
3	Spring	1	Steel Wire	Ni-Plating
2	Cam Strick	1	PBS Wire	Natural
1	Frame	1	Spcc	Ni-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	標示pin編號	Jack	063015
5	更新P.C.B LAYOUT	Jack	061515
4	更新材質	Jack	052915
3	新增SPEC	Jack	052515
2	新增Operating Mode	Jack	072514
1	新增"DC"圖樣	Jack	081513


**东莞市高迪电子有限公司**  
 Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S  

 UNITS MM

DRAWN BY:	DATE
Jack Lu	06/30/15
CHECKED BY:	DATE
Jacky Chen	06/30/15
APPROVED BY:	DATE
Tony Kao	06/30/15

MAT'L	TITLE	SIZE
	SWITCH	A4
FINISH	MODLE	VER
	PUSH SWITCH 藍柄 自鎖式	R6
SCALE	DWG NO.	
1 : 1	PS-12E05-S191	
SHEET NO.	PART NO.	
1 of 1	PS-12E05-S191	