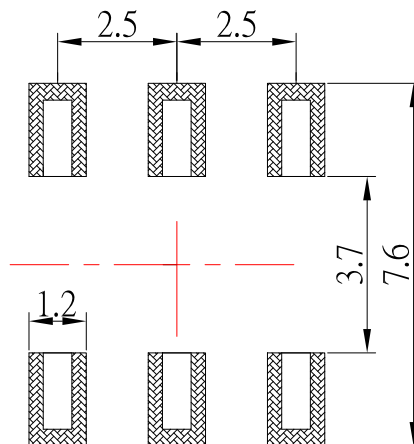
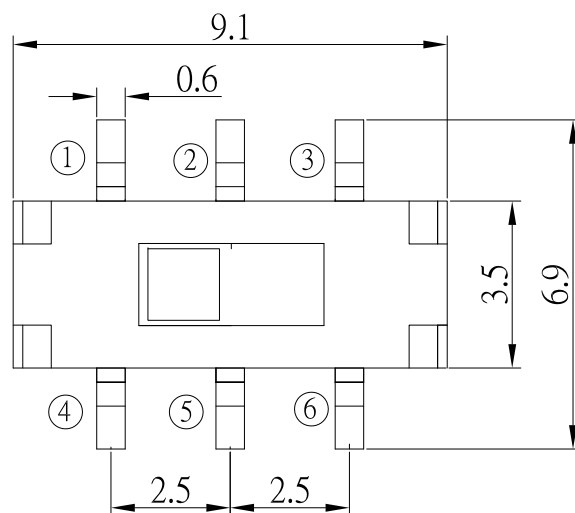




NO	MODEL	Knob(X)
1	SS-D35S	2.0 mm
2	SS-D35SB	4.0 mm

CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	190 $\pm$ 50gf
Operating Life	10,000 cycles

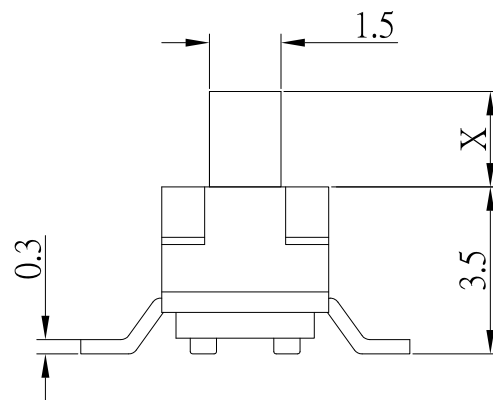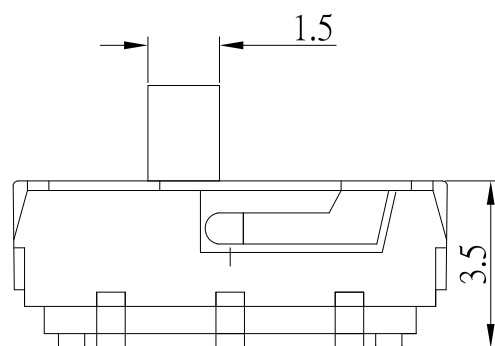

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
07/30/14
DATE
07/30/14
DATE
07/30/14

MAT'L
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

SWITCH
SMT SLIDE SWICTH

SS-D35Sx-B-S246

PART NO. SS-D35Sx-B-S246

SIZE
A4
VER
R3