

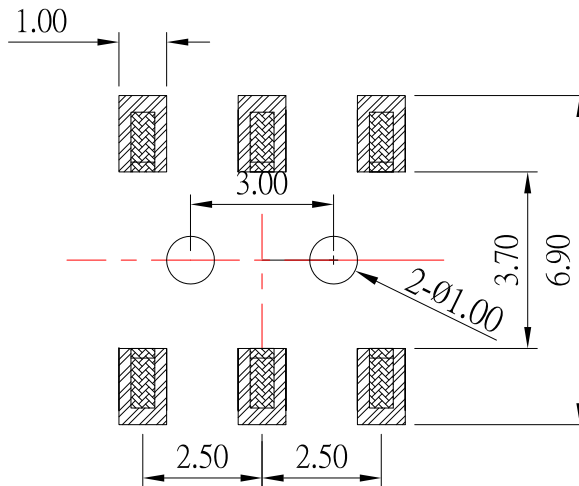


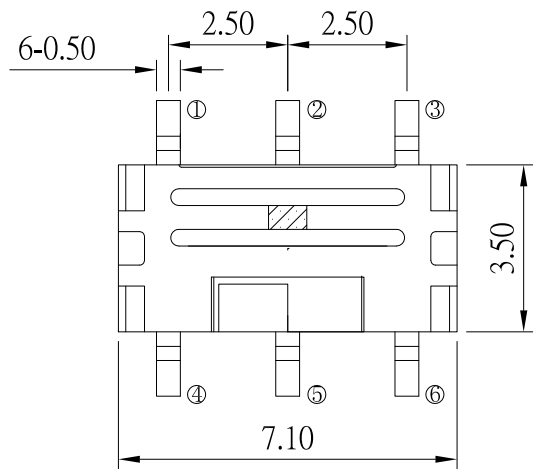

P.C.B LAND PATTERN





CIRCUIT DIAGRAM

MODEL NO.	SS-C90-S246	SS-C90A-S246	SS-C90B-S246	SS-C90C-S246
L (mm)	1.0	1.5	2.0	3.0
H (mm)	2.5	3.0	3.5	4.5

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	170 $\pm$ 50gf
Operating Life	10,000 cycles

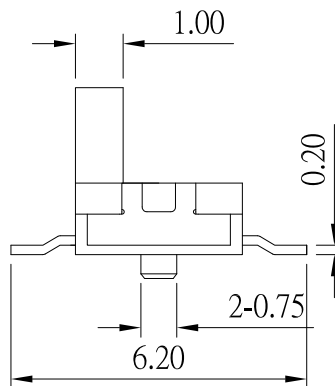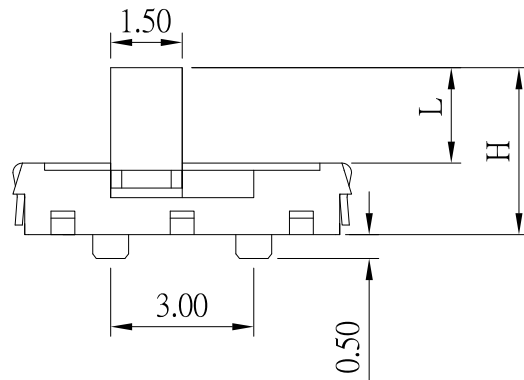

8	更新圖面	Jack	120914
7	更新CLIP材質	Jack	101514
6	更新Operating Force:150 $\pm$ 70gf	Jack	082214
5	更新材質	Jack	021414
4	新增高度選項"A"	Jack	021014
3	更新料號	Jack	112213
2	更新Rating及CIRCUIT DIAGRAM	Jack	062813
1	更新材質	Jack	060713
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	12/09/14
CHECKED BY:	DATE
Jacky Chen	12/09/14
APPROVED BY:	DATE
Tony Kao	12/09/14

MAT'L	TITLE	SWITCH
FINISH	MODLE	SLIDE SWITCH
SCALE	DWG NO.	SS-C90x-S246
SHEET NO.	PART NO.	SS-C90x-S246
1 of 1		
		SIZE A4
		VER A8