
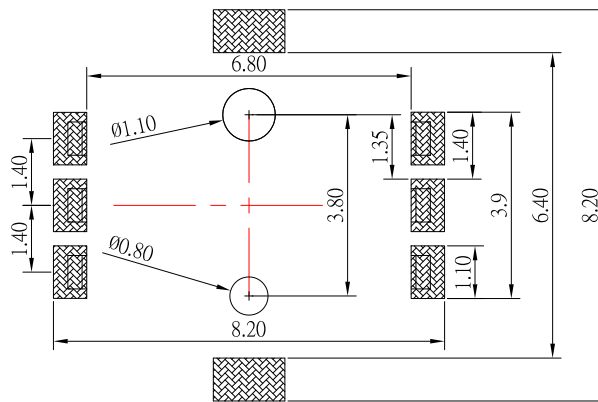
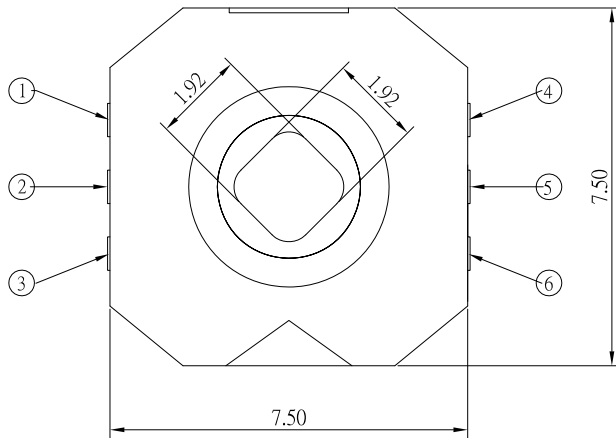
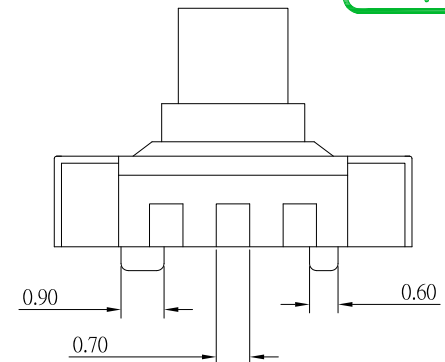
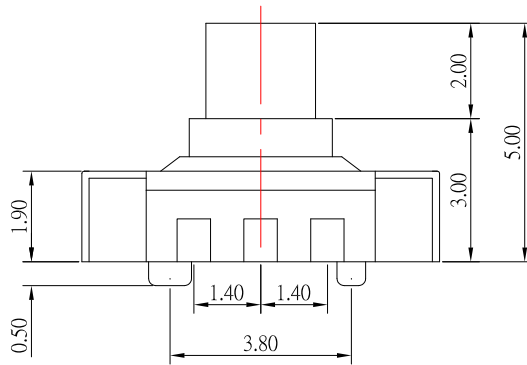


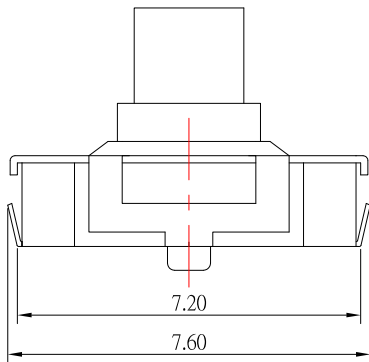

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.1A 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Life	50,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	Ag plated
B	CASE	1	LCP	Black
A	Knob	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 07/30/13
CHECKED BY: Jacky Chen
DATE: 07/30/13
APPROVED BY: Tony Kao
DATE: 07/30/13

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: Multi Function SWITCH
DWG NO.: K03-S246
PART NO.: K03-S246

SIZE: A4
VER: R1

1	更新材質	Jack	073013
ITEM NO.	DESCRIPTION	DRAWN	DATE