
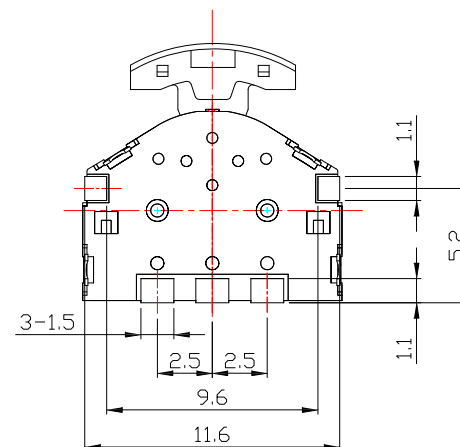
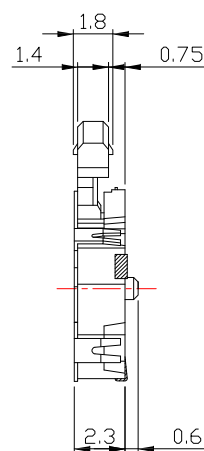




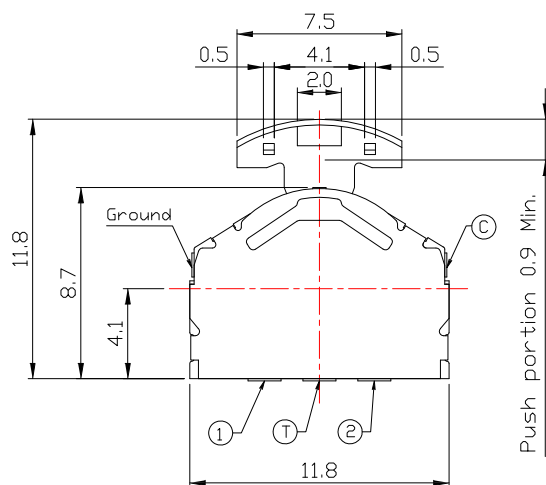


CODE TABLE ( =ON)

| Angle    | (25°) | (18°) | 0° | (18°) | (25°) |
|----------|-------|-------|----|-------|-------|
| Terminal |       |       |    |       |       |
| ①        |       |       |    |       |       |
| ②        |       |       |    |       |       |
| ③        |       |       |    |       |       |

CCW ← → CW

CODE TABLE

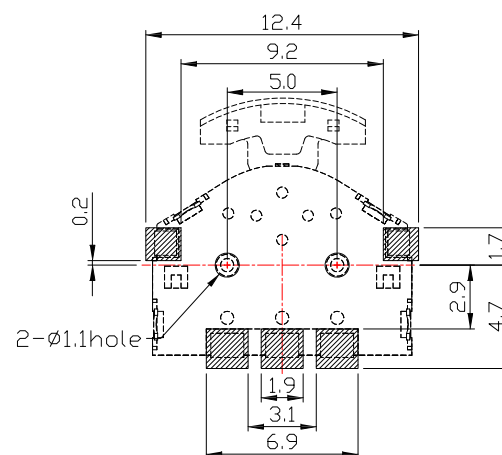

SPECIFICATIONS

|                         |                                         |
|-------------------------|-----------------------------------------|
| Rating                  | DC 5V 10mA                              |
| Output Voltage          | 1V Min, at 5V 1mA                       |
| Travel                  | Center 0.9mm Min                        |
| Operating Force         | Lever 70 ± 50 gf<br>Center 200 ± 100 gf |
| Operating Life (cycles) | 100,000                                 |

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE  
04/12/13  
DATE  
04/12/13  
DATE  
04/12/13

MAT'L  
FINISH  
SCALE  
SHEET NO.

TITLE  
MODLE  
DWG NO.  
PART NO.

SWITCH  
LEVER PUSH SWITCH  
K01C-S126  
K01C-S126

SIZE  
A4  
VER  
R